

SANPACK®



Main catalogue 2020



Floor marking and labels

Contents

Floor marking	page
Floor marking tapes.....	5
Floor marking and labels.....	14
Storage location marker.....	16
Deep-freeze labelling.....	18
Optical and magnetic tracking.....	20
Ground signs - Outdoor.....	22
Safety sign - ground.....	24

Anti-slip solutions	
Anti-slip tapes.....	28
Stair edge profile.....	30

Orientation and signposting	
Photoluminescent marking.....	32
Escape signs.....	34
Fire safety signs.....	36

Signs and marks	
Safety signs.....	38
Accessories & installation helpers.....	44
Labels.....	46
Bulk storage signs.....	48
Spray stencils.....	49

Industrial tapes	
Cloth adhesive tapes	50
Technical adhesive tapes	52

Explanation of the pictograms

 Outside use	 Suitable for wet zones	 Slip class R10	 Barcode
 Indoor use	 For smooth surfaces	 Slip class R11	 The text you want
 Suitable for deep-freezing	 For structured surfaces	 Slip class R12	 Rolled goods
 Suitable for pedestrians	 For strongly structured surfaces	 Slip class R13	 Bundled
 Suitable for lifting trucks	 Slip resistance	 Magnetic	 Sheet material
 Suitable for forklifts	 Slip class R9	 Inscribable	

Note for selecting and bonding ground markings and ground signs

All self-adhesive markings, signs, etc. offered in the catalogue comprise articles subject to wear depending on the load. Before making a selection, note the following points to find the right product for you: You should be aware that there is no 100% staple resistant self-adhesive ground marking.

- Where needs to be marked?** - indoor or outdoor
- What are the ground conditions there?** - e.g. smooth concrete screed, asphalt or concrete paving
- What load will the material be exposed to?** - forklift, pallet truck, pedestrian traffic low or heavily frequented
- Can damages due to heavy loads be restricted?** - e.g. with segmented ground marking, without restricting their function, or by attachment to places that are not heavily loaded
- Outdoor installation** - primer is required for asphalt, concrete and other absorbent substrates (coarse pored)
- Is slip resistance required** - slip resistance or slip class R9 - R13
- Laying instructions** - dry surface free from grease, dust and impurities with laying temperature >12°C

When the aforementioned points are considered, all the advantages, such as immediate accessibility, individual marking, quick removability or the high contribution to 5S, of self-adhesive products come into their own.

If you have any questions, please contact our sales team, we are happy to advise you.

Which floor marking tape for which application

The following table quickly shows you which marking tape is most suitable for your ground. The tapes given are recommendations, a test bond and sample is always advisable.

Floor	Area	Degree of loading and surface quality of the ground marking tape				
		Pedestrian traffic		Lift truck traffic		Forklifts
		Standard	with slip resistance	Standard	with slip resistance	
Smooth concrete screed	Inside	WT-5125 / P.8 WT-500 / P.5	WT-5420 / P.11 WT-5645 / P.7	WT-500 / P.5 WT-5125 / P.8	WT-5845 / P.6 WT-5645 / P.7	WT-6000 / P.5 WT-500 / P.5
	Outside		WT-5845 / P.6 WT-5645 / P.7		WT-5845 / P.6 WT-5645 / P.7	
EP/ PU/ MMA coating	Inside	WT-5229 / P.10 WT-5125 / P.8	WT-5420 / P.11 WT-5429 / P.10	WT-5229 / P.10 WT-5125 / P.8	WT-5420 / P.11 WT-5429 / P.10	WT-6000 / P.5 WT-500 / P.5
	Outside		WT-5845 / P.6 WT-5645 / P.7		WT-5845 / P.6 WT-5645 / P.7	
EP/ PU/ MMA anti-slip	Inside	WT-5645 / P.7 WT-5845 / P.6	WT-5645 / P.7 WT-5845 / P.6	WT-5645 / P.7 WT-5845 / P.6	WT-5645 / P.7 WT-5845 / P.6	
	Outside		WT-5645 / P.7 WT-5845 / P.6		WT-5645 / P.7 WT-5845 / P.6	
Tiles	Inside	WT-5124 / P.8 WT-5224 / P.10	WT-5429 / P.10 WT-5420 / P.11	WT-500 / P.5 WT-5229 / P.10	WT-5429 / P.10 WT-5420 / P.11	
	Outside					
Concrete paving	Inside	WT-5846 / P.6 WT-5645 / P.7	WT-5845 / P.6 WT-5645 / P.7	WT-5846 / P.6 WT-5645 / P.7	WT-5845 / P.6 WT-5645 / P.7	
	Outside		WT-5845 / P.6 WT-5645 / P.7		WT-5845 / P.6 WT-5645 / P.7	
Asphalt	Inside	WT-5846 / P.6 WT-5645 / P.7	WT-5846 / P.6 WT-5645 / P.7	WT-5846 / P.6 WT-5645 / P.7	WT-5846 / P.6 WT-5645 / P.7	
	Outside		WT-5846 / P.6 WT-5645 / P.7		WT-5846 / P.6 WT-5645 / P.7	


Drive-over floor marking tape || WT-6000

Holds to what it promises

- Extremely wear-resistant
- High resistance with permanent load
- Dirt-resistant surface
- Only suitable for smooth floors indoors

Material: Metal
Material thickness: 0.7 mm
Surface: glossy
Slip class: /
Adhesive: permanent acrylate adhesive
Application area: inside

Colour		75 mm x 1.5 m	75 mm x 6 m	100 mm x 1.5 m	100 mm x 6 m	PU
yellow		5611.04.075	5611.04.075-6	5611.04.100	5611.04.100-6	1
red		5611.01.075	5611.01.075-6			1
blue		5611.10.075	5611.10.075-6			1
green		5611.02.075	5611.02.075-6			1
grey		5611.06.075	5611.06.075-6			1
white		5611.08.075	5611.08.075-6	5611.08.100	5611.08.100-6	1
black		5611.07.075	5611.07.075-6			1

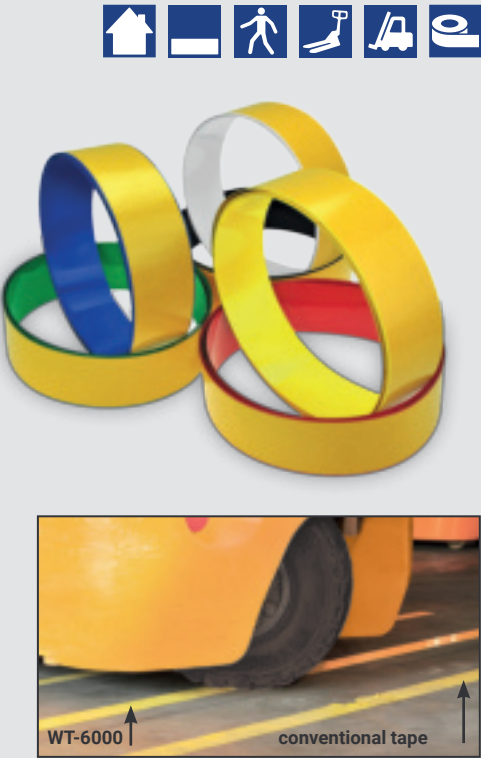

Resistant floor marking tape || WT-500

Slanting tape

- Beveled edges prevent damage to the border
- Wear-resistant and high resistance with permanent load
- Dirt-resistant surface
- Only suitable for smooth floors indoors

Material: PVC
Material thickness: 1.1 mm
Surface: matt
Slip class: /
Adhesive: permanent acrylate adhesive
Application area: inside

Colour		50 mm x 25 m	50 mm x 10 m	75 mm x 25 m	75 mm x 10 m	100 mm x 25 m	100 mm x 10 m	PU
yellow		6125.04.050	6125.04.050-10	6125.04.075	6125.04.075-10	6125.04.100	6125.04.100-10	1
red		6125.01.050	6125.01.050-10	6125.01.075	6125.01.075-10	6125.01.100	6125.01.100-10	1
blue		6125.10.050	6125.10.050-10	6125.10.075	6125.10.075-10	6125.10.100	6125.10.100-10	1
green		6125.02.050	6125.02.050-10	6125.02.075	6125.02.075-10	6125.02.100	6125.02.100-10	1
white		6125.08.050	6125.08.050-10	6125.08.075	6125.08.075-10	6125.08.100	6125.08.100-10	1
black		6125.07.050	6125.07.050-10	6125.07.075	6125.07.075-10	6125.07.100	6125.07.100-10	1
yellow/black		6125.17.050-25L	6125.17.050-10L	6125.17.075-25L	6125.17.075-10L	6125.17.100-25L	6125.17.100-10L	1
red/white		6125.18.050-25L	6125.18.050-10L	6125.18.075-25L	6125.18.075-10L	6125.18.100-25L	6125.18.100-10L	1

i Laying instructions: When laying lengths of 10m and more, we recommend installing expansion joints of 5mm.


ESD Protected Area					FORKLIFT TRAFFIC					Text as desired				
Text	length	50 mm	75 mm	PU	Text	length	50 mm	75 mm	PU	Text	length	50 mm	75 mm	PU
ESD	5 m	6125.84.B50-5	6125.84.B75-5	1	Fork-lift	5 m	6125.78.B50-5	6125.78.B75-5	1	On request	5 m	6125.99.B50-5	6125.99.B75-5	1

Durable floor marking tape || WT-5845

The tape for difficult ground

- | Retro reflective and anti-slip R11 surface
- | Extremely wear-resistant and strongly adhesive
- | Can also be used outdoors
- | Suitable for rough and uneven surfaces

Material: PU
Material thickness: 1.6 mm
Surface: reflective
Slip class: R11
Adhesive: extra permanent synthetic rubber
Application area: for indoors and outdoors

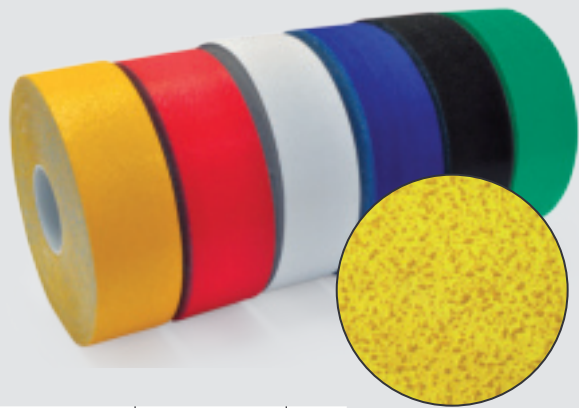

Colour		50 mm x 25 m	50 mm x 12.5 m	75 mm x 25 m	75 mm x 12.5 m	100 mm x 25 m	100 mm x 12.5 m	PU
yellow		5845.04.050	5845.04.050-12	5845.04.075	5845.04.075-12	5845.04.100	5845.04.100-12	1
red		5845.01.050	5845.01.050-12	5845.01.075	5845.01.075-12	5845.01.100	5845.01.100-12	1
blue		5845.10.050	5845.10.050-12	5845.10.075	5845.10.075-12	5845.10.100	5845.10.100-12	1
green		5845.02.050	5845.02.050-12	5845.02.075	5845.02.075-12	5845.02.100	5845.02.100-12	1
white		5845.08.050	5845.08.050-12	5845.08.075	5845.08.075-12	5845.08.100	5845.08.100-12	1
black		5845.07.050	5845.07.050-12	5845.07.075	5845.07.075-12	5845.07.100	5845.07.100-12	1

i Laying instructions: outside, pre-treat the substrate with Primer No. 5.

Tactile floor marking tape || WT-5847

The tape for visually impaired people

- | Optical and tactile differentiation from conventional tapes
- | Allows visually impaired people to find their way around
- | Extremely wear-resistant and strongly adhesive
- | Grip and non-slip surface, also when wet
- | Can also be used outdoors
- | Suitable for rough and uneven surfaces

Material: PU
Material thickness: 2.6 mm
Surface: matt reflective
Slip class: /
Adhesive: extra permanent synthetic rubber
Application area: for indoors and outdoors



Colour		30 mm x 12.5 m	50 mm x 12.5 m	75 mm x 12.5 m	100 mm x 12.5 m	PU
yellow		5847.04.030-12	5847.04.050-12	5847.04.075-12	5847.04.100-12	1
white		5847.08.030-12	5847.08.050-12	5847.08.075-12	5847.08.100-12	1

i Laying instructions: outside, pre-treat the substrate with Primer No. 5.

Durable floor marking tape || WT-5846

The tape for difficult ground

- | Like WT-5845, but with a smooth surface
- | Extremely wear-resistant and strongly adhesive
- | Suitable for rough and uneven surfaces

Material: PU
Material thickness: 1.2 mm
Surface: slightly glossy
Slip class: /
Adhesive: extra permanent synthetic rubber
Application area: for indoors



Colour		50 mm x 25 m	50 mm x 12.5 m	75 mm x 25 m	75 mm x 12.5 m	100 mm x 25 m	100 mm x 12.5 m	PU
yellow		5846.04.050	5846.04.050-12	5846.04.075	5846.04.075-12	5846.04.100	5846.04.100-12	1
red		5846.01.050	5846.01.050-12	5846.01.075	5846.01.075-12	5846.01.100	5846.01.100-12	1
blue		5846.10.050	5846.10.050-12	5846.10.075	5846.10.075-12	5846.10.100	5846.10.100-12	1
green		5846.02.050	5846.02.050-12	5846.02.075	5846.02.075-12	5846.02.100	5846.02.100-12	1
white		5846.08.050	5846.08.050-12	5846.08.075	5846.08.075-12	5846.08.100	5846.08.100-12	1


i Laying instructions: outside, pre-treat the substrate with Primer No. 5.

Conformable floor marking tape || WT-5645

The tape that gets things into shape

- | Adapts to the profile of the substrate
- | Slip resistance R11 according to DIN 51130
- | Particularly for uneven surfaces
- | as well as concrete paving and asphalt floors

Material: coated soft aluminium
Material thickness: 0.6 mm
Surface: slightly glossy
Slip class: R11
Adhesive: extra permanent synthetic rubber
Application area: for indoors and outdoors

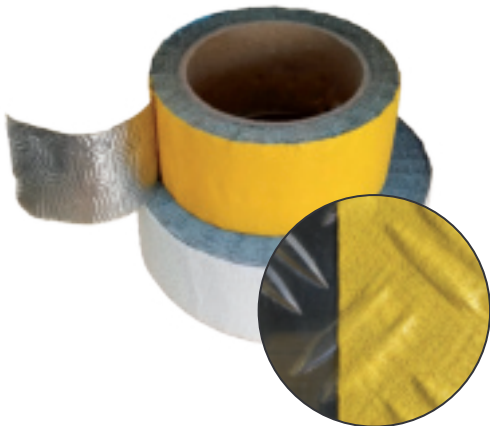

Colour		50 mm x 12.5 m	75 mm x 12.5 m	100 mm x 12.5 m	PU
yellow		5645.04.050-12	5645.04.075-12	5645.04.100-12	1
white		5645.08.050-12	5645.08.075-12	5645.08.100-12	1

i Laying instructions: use pressure rollers for profiled surfaces. Outside, pre-treat the substrate with Primer No. 5.

Primer No. 5

- | Primer No. 5 increases the adhesive strength of a tape on critical surfaces
- | ALWAYS required for outdoor use!


250 ml (0.75 m²)	1000 ml (3 m²)
3051.25.250	3051.25.1000



Pressure roller

- | Profi-pressure roller for laying self-adhesive markings

Short version (1)	Long version (2)
8002.11.031	8002.00.921



Conformable storage location marking || WT-5610

- | Ideal for marking pallet storage locations
- | Further materials, designs and colours can be found on page 16 in this catalogue


		L-piece 50 mm	L-piece 75 mm	T-piece 50 mm	T-piece 75 mm	longitudinal piece 50 mm	longitudinal piece 75 mm	Round 50 mm	Round 75 mm
Colour	PU	25 piece	25 piece	25 piece	25 piece	25 piece	25 piece	25 piece	25 piece
yellow		5610.04.060	5610.04.063	5610.04.061	5610.04.065	5610.04.071	5610.04.073	5610.04.069	5610.04.070
white		5610.08.060	5610.08.063	5610.08.061	5610.08.065	5610.08.071	5610.08.073	5610.08.069	5610.08.070

Standard floor marking tape || WT-5160

The general tape

- | Sticks quickly
- | Easily removable
- | Ideal for variable marking
- | Suitable for smooth floors indoors

Material: PVC
Material thickness: 0.16 mm
Surface: matt
Slip class: /
Adhesive: good adhesion rubber adhesive
Application area: inside

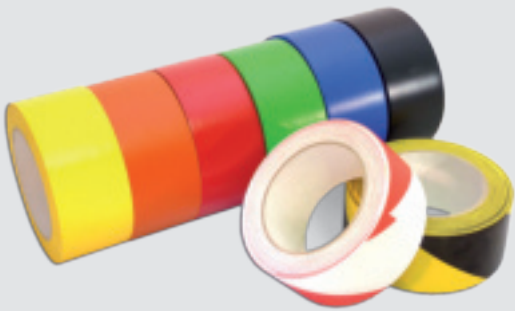

Standard marking tape plus || WT-5164

- | Similar to WT-5160, additionally with protective laminate

Colour		50 mm x 33 m	75 mm x 33 m	PU
yellow		5160.04.050	5160.04.075	1
red		5160.01.050	5160.01.075	1
orange		5160.12.050	5160.12.075	1
blue		5160.10.050	5160.10.075	1
green		5160.02.050	5160.02.075	1
white		5160.08.050	5160.08.075	1
black		5160.07.050	5160.07.075	1
yellow/black		5160.17.050	5160.17.075	1
red/white		5160.18.050	5160.18.075	1

Colour		50 mm x 33 m	75 mm x 33 m	PU
black		5164.07.050	5164.07.075	1
yellow/black		5164.17.050	5164.17.075	1
red/white		5164.18.050	5164.18.075	1

Printed floor marking
For labelling of important areas



Floor marking tape || WT-5125

The universal tape

- | Great variety of colours
- | Also available as segmented marking and storage location marking
- | Resistant
- | Suitable for smooth floors indoors

Material: PVC
Material thickness: 0.5 mm
Surface: matt
Slip class: /
Adhesive: permanent acrylate adhesive
Application area: inside



NEW Now also with extra strong adhesive for difficult substrates - on request!

Colour		50 mm x 25 m	50 mm x 10 m	75 mm x 25 m	75 mm x 10 m	100 mm x 25 m	100 mm x 10 m	PU
yellow		5125.04.050	5125.04.050-10	5125.04.075	5125.04.075-10	5125.04.100	5125.04.100-10	1
red		5125.01.050	5125.01.050-10	5125.01.075	5125.01.075-10	5125.01.100	5125.01.100-10	1
light blue		5125.03.050	5125.03.050-10	5125.03.075	5125.03.075-10	5125.03.100	5125.03.100-10	1
blue		5125.10.050	5125.10.050-10	5125.10.075	5125.10.075-10	5125.10.100	5125.10.100-10	1
light green		5125.15.050	5125.15.050-10	5125.15.075	5125.15.075-10	5125.15.100	5125.15.100-10	1
green		5125.02.050	5125.02.050-10	5125.02.075	5125.02.075-10	5125.02.100	5125.02.100-10	1
orange		5125.12.050	5125.12.050-10	5125.12.075	5125.12.075-10	5125.12.100	5125.12.100-10	1
pink		5125.25.050	5125.25.050-10	5125.25.075	5125.25.075-10	5125.25.100	5125.25.100-10	1
purple		5125.26.050	5125.26.050-10	5125.26.075	5125.26.075-10	5125.26.100	5125.26.100-10	1
white		5125.08.050	5125.08.050-10	5125.08.075	5125.08.075-10	5125.08.100	5125.08.100-10	1
light grey		5125.06.050	5125.06.050-10	5125.06.075	5125.06.075-10	5125.06.100	5125.06.100-10	1
dark grey		5125.11.050	5125.11.050-10	5125.11.075	5125.11.075-10	5125.11.100	5125.11.100-10	1
black		5125.07.050	5125.07.050-10	5125.07.075	5125.07.075-10	5125.07.100	5125.07.100-10	1
yellow/black		5125.17.050	5125.17.050-10	5125.17.075	5125.17.075-10	5125.17.100	5125.17.100-10	1
red/white		5125.18.050	5125.18.050-10	5125.18.075	5125.18.075-10	5125.18.100	5125.18.100-10	1
blue/white			5125.21.050-10		5125.21.075-10		5125.21.100-10	1
green/white			5125.19.050-10		5125.19.075-10		5125.19.100-10	1
black/white			5125.20.050-10		5125.20.075-10		5125.20.100-10	1

Universal printed ground marking

The ideal complement to the tape WT-5125

- | Individual design – text and characters freely combinable
- | Available as strips or rolled goods
- | Slip resistance R11 according to the variant
- | Suitable for smooth floors indoors



length	50 mm	75 mm	PU
60 cm	5125.59/037.B50-06	5125.59/037.B75-06	1
5 m	5125.59/037.B50-5	5125.59/037.B75-5	1
60 cm	5415.59/037.B50-06 non-slip surface	5415.59/037.B75-06 non-slip surface	1

length	50 mm	75 mm	PU
60 cm	5125.84.B50-06	5125.84.B75-06	1
5 m	5125.84.B50-5	5125.84.B75-5	1
60 cm	5415.84.B50-06 non-slip surface	5415.84.B75-06 non-slip surface	1

length	50 mm	75 mm	PU
60 cm	5125.78.B50-06	5125.78.B75-06	1
5 m	5125.78.B50-5	5125.78.B75-5	1
60 cm	5415.78.B50-06 non-slip surface	5415.78.B75-06 non-slip surface	1

length	50 mm	75 mm	PU
60 cm	5125.60.B50-06	5125.60.B75-06	1
5 m	5125.60.B50-5	5125.60.B75-5	1
60 cm	5415.60.B50-06 non-slip surface	5415.60.B75-06 non-slip surface	1

length	50 mm	75 mm	PU
60 cm	5125.85.B50-06	5125.85.B75-06	1
5 m	5125.85.B50-5	5125.85.B75-5	1
60 cm	5415.85.B50-06 non-slip surface	5415.85.B75-06 non-slip surface	1

length	50 mm	75 mm	PU
60 cm	5125.49/1.B50-06	5125.49/1.B75-06	1
5 m	5125.49/1.B50-5	5125.49/1.B75-5	1
60 cm	5415.49/1.B50-06 non-slip surface	5415.49/1.B75-06 non-slip surface	1



Dirt-repellent ground marking tape || WT-5229

The extra thin tape for high demands

- | Suitable for hygiene, food and clean room areas
- | Extra thin and tear-resistant
- | Also available as segmented marking and storage location marking
- | Suitable for smooth floors indoors

Material: Polyester
Material thickness: 0.2 mm
Surface: glossy
Slip class: /
Adhesive: permanent or removable acrylate adhesive
Application area: inside

Suitable storage location marking can be found on page 16

Colour	Permanent adhesive			Removable adhesive			PU
	50 mm x 15 m	75 mm x 15 m	100 mm x 15 m	50 mm x 15 m	75 mm x 15 m	100 mm x 15 m	
yellow	5229.04.050-15	5229.04.075-15	5229.04.100-15	5229.1.04.050-15	5229.1.04.075-15	5229.1.04.100-15	1
red	5229.01.050-15	5229.01.075-15	5229.01.100-15	5229.1.01.050-15	5229.1.01.075-15	5229.1.01.100-15	1
blue	5229.10.050-15	5229.10.075-15	5229.10.100-15	5229.1.10.050-15	5229.1.10.075-15	5229.1.10.100-15	1
green	5229.02.050-15	5229.02.075-15	5229.02.100-15	5229.1.02.050-15	5229.1.02.075-15	5229.1.02.100-15	1
orange	5229.12.050-15	5229.12.075-15	5229.12.100-15	5229.1.12.050-15	5229.1.12.075-15	5229.1.12.100-15	1
white	5229.08.050-15	5229.08.075-15	5229.08.100-15	5229.1.08.050-15	5229.1.08.075-15	5229.1.08.100-15	1
black	5229.07.050-15	5229.07.075-15	5229.07.100-15	5229.1.07.050-15	5229.1.07.075-15	5229.1.07.100-15	1
yellow/black	5229.17.050-15	5229.17.075-15	5229.17.100-15	5229.1.17.050-15	5229.1.17.075-15	5229.1.17.100-15	1
red/white	5229.18.050-15	5229.18.075-15	5229.18.100-15	5229.1.18.050-15	5229.1.18.075-15	5229.1.18.100-15	1
black/white	5229.20.050-15	5229.20.075-15	5229.20.100-15	5229.1.20.050-15	5229.1.20.075-15	5229.1.20.100-15	1
photoluminescent Material thickness: 0.6 mm Attention length: 10 m	5127.29.050-10	5127.29.075-10	5127.29.100-10	---	---	---	1




NEW

Floor marking tape with anti-slip surface plus || WT-5420

The extra thin tape for high demands

- | Suitable for wet, dry and sanitary areas
- | Slip resistance R12 according to DIN 51130 / Class C according to DIN 51097
- | Extra thin and tear-resistant
- | Large variety of colours and individually printable on request
- | Suitable for smooth floors indoors

Material: Plastic foil
Material thickness: 0.3 mm
Surface: glossy
Slip class: R12 according to DIN 51130 / Class C according to DIN 51097
Adhesive: permanent or removable acrylate adhesive
Application area: inside

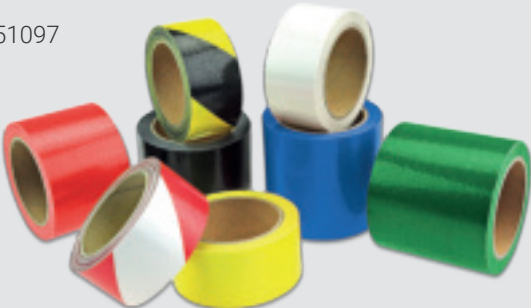

Colour	Permanent adhesive			Removable adhesive			PU
	50 mm x 10 m	75 mm x 10 m	100 mm x 10 m	50 mm x 10 m	75 mm x 10 m	100 mm x 10 m	
yellow	5420.04.050-10	5420.04.075-10	5420.04.100-10	5420.1.04.050-10	5420.1.04.075-10	5420.1.04.100-10	1
red	5420.01.050-10	5420.01.075-10	5420.01.100-10	5420.1.01.050-10	5420.1.01.075-10	5420.1.01.100-10	1
blue	5420.10.050-10	5420.10.075-10	5420.10.100-10	5420.1.10.050-10	5420.1.10.075-10	5420.1.10.100-10	1
green	5420.02.050-10	5420.02.075-10	5420.02.100-10	5420.1.02.050-10	5420.1.02.075-10	5420.1.02.100-10	1
orange	5420.12.050-10	5420.12.075-10	5420.12.100-10	5420.1.12.050-10	5420.1.12.075-10	5420.1.12.100-10	1
white	5420.08.050-10	5420.08.075-10	5420.08.100-10	5420.1.08.050-10	5420.1.08.075-10	5420.1.08.100-10	1
black	5420.07.050-10	5420.07.075-10	5420.07.100-10	5420.1.07.050-10	5420.1.07.075-10	5420.1.07.100-10	1
yellow/black	5420.17.050-10	5420.17.075-10	5420.17.100-10	5420.1.17.050-10	5420.1.17.075-10	5420.1.17.100-10	1
red/white	5420.18.050-10	5420.18.075-10	5420.18.100-10	5420.1.18.050-10	5420.1.18.075-10	5420.1.18.100-10	1
black/white	5420.20.050-10	5420.20.075-10	5420.20.100-10	5420.1.20.050-10	5420.1.20.075-10	5420.1.20.100-10	1

NEW


Floor marking tape with anti-slip surface || WT-5429

The extra thin tape for high demands

- | Suitable for hygiene, food and clean room areas
- | Slip resistance R10 according to DIN 51130
- | Easy to clean, extra thin and tear-resistant
- | Large variety of colours and individually printable on request
- | Suitable for smooth floors indoors

Material: Plastic foil
Material thickness: 0.3 mm
Surface: glossy
Slip class: R10 according to DIN 51130
Adhesive: permanent or removable acrylate adhesive
Application area: inside

Colour	Permanent adhesive			Removable adhesive			PU
	50 mm x 10 m	75 mm x 10 m	100 mm x 10 m	50 mm x 10 m	75 mm x 10 m	100 mm x 10 m	
yellow	5429.04.050-10	5429.04.075-10	5429.04.100-10	5429.1.04.050-10	5429.1.04.075-10	5429.1.04.100-10	1
red	5429.01.050-10	5429.01.075-10	5429.01.100-10	5429.1.01.050-10	5429.1.01.075-10	5429.1.01.100-10	1
blue	5429.10.050-10	5429.10.075-10	5429.10.100-10	5429.1.10.050-10	5429.1.10.075-10	5429.1.10.100-10	1
green	5429.02.050-10	5429.02.075-10	5429.02.100-10	5429.1.02.050-10	5429.1.02.075-10	5429.1.02.100-10	1
orange	5429.12.050-10	5429.12.075-10	5429.12.100-10	5429.1.12.050-10	5429.1.12.075-10	5429.1.12.100-10	1
white	5429.08.050-10	5429.08.075-10	5429.08.100-10	5429.1.08.050-10	5429.1.08.075-10	5429.1.08.100-10	1
black	5429.07.050-10	5429.07.075-10	5429.07.100-10	5429.1.07.050-10	5429.1.07.075-10	5429.1.07.100-10	1
yellow/black	5429.17.050-10	5429.17.075-10	5429.17.100-10	5429.1.17.050-10	5429.1.17.075-10	5429.1.17.100-10	1
red/white	5429.18.050-10	5429.18.075-10	5429.18.100-10	5429.1.18.050-10	5429.1.18.075-10	5429.1.18.100-10	1
black/white	5429.20.050-10	5429.20.075-10	5429.20.100-10	5429.1.20.050-10	5429.1.20.075-10	5429.1.20.100-10	1
photoluminescent Material thickness: 0.6 mm	5429.29.050-10	5429.29.075-10	5429.29.100-10	---	---	---	1

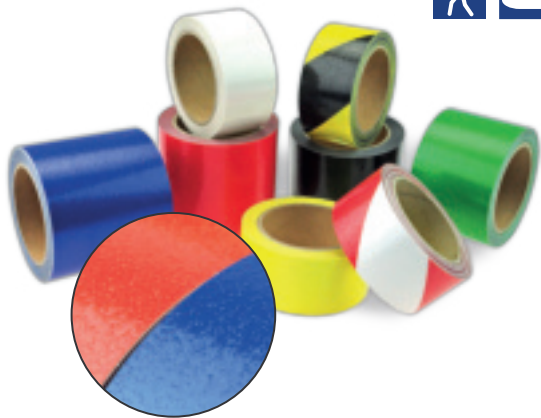

Printed floor marking

The ideal complement to tapes WT-5229, WT-5429 and WT-5420


- | Individual design – text and characters freely combinable
- | Available as strips or rolled goods
- | Slip resistance according to the variant
- | Easy to clean, extra thin and tear-resistant



Text as desired					access prohibited					ESD Protected Area				
Material	length	50 mm	75 mm	PU	Material	length	50 mm	75 mm	PU	Material	length	50 mm	75 mm	PU
WT-5229 permanent	60 cm	5229.99.B50-06	5229.99.B75-06	1	WT-5229 permanent	60 cm	5229.85.B50-06	5229.85.B75-06	1	WT-5229 permanent	60 cm	5229.84.B50-06	5229.84.B75-06	1
	5 m	5229.99.B50-5	5229.99.B75-5	1		5 m	5229.85.B50-5	5229.85.B75-5	1		5 m	5229.84.B50-5	5229.84.B75-5	1
WT-5429 permanent	60 cm	5429.99.B50-06	5429.99.B75-06	1	WT-5429 permanent	60 cm	5429.85.B50-06	5429.85.B75-06	1	WT-5429 permanent	60 cm	5429.84.B50-06	5429.84.B75-06	1
	5 m	5429.99.B50-5	5429.99.B75-5	1		5 m	5429.85.B50-5	5429.85.B75-5	1		5 m	5429.84.B50-5	5429.84.B75-5	1
WT-5420 permanent	60 cm	5420.99.B50-06	5420.99.B75-06	1	WT-5420 permanent	60 cm	5420.85.B50-06	5420.85.B75-06	1	WT-5420 permanent	60 cm	5420.84.B50-06	5420.84.B75-06	1
	5 m	5420.99.B50-5	5420.99.B75-5	1		5 m	5420.85.B50-5	5420.85.B75-5	1		5 m	5420.84.B50-5	5420.84.B75-5	1

WATCH YOUR STEP					FORK LIFT TRAFFIC					caution light barrier				
Material	length	50 mm	75 mm	PU	Material	length	50 mm	75 mm	PU	Material	length	50 mm	75 mm	PU
WT-5229 permanent	60 cm	5229.49.1.B50-06	5229.49.1.B75-06	1	WT-5229 permanent	60 cm	5229.78.B50-06	5229.78.B75-06	1	WT-5229 permanent	60 cm	5229.60.B50-06	5229.60.B75-06	1
	5 m	5229.49.1.B50-5	5229.49.1.B75-5	1		5 m	5229.78.B50-5	5229.78.B75-5	1		5 m	5229.60.B50-5	5229.60.B75-5	1
WT-5429 permanent	60 cm	5429.49.1.B50-06	5429.49.1.B75-06	1	WT-5429 permanent	60 cm	5429.78.B50-06	5429.78.B75-06	1	WT-5429 permanent	60 cm	5429.60.B50-06	5429.60.B75-06	1
	5 m	5429.49.1.B50-5	5429.49.1.B75-5	1		5 m	5429.78.B50-5	5429.78.B75-5	1		5 m	5429.60.B50-5	5429.60.B75-5	1
WT-5420 permanent	60 cm	5420.49.1.B50-06	5420.49.1.B75-06	1	WT-5420 permanent	60 cm	5420.78.B50-06	5420.78.B75-06	1	WT-5420 permanent	60 cm	5420.60.B50-06	5420.60.B75-06	1
	5 m	5420.49.1.B50-5	5420.49.1.B75-5	1		5 m	5420.78.B50-5	5420.78.B75-5	1		5 m	5420.60.B50-5	5420.60.B75-5	1

Segmented floor marking

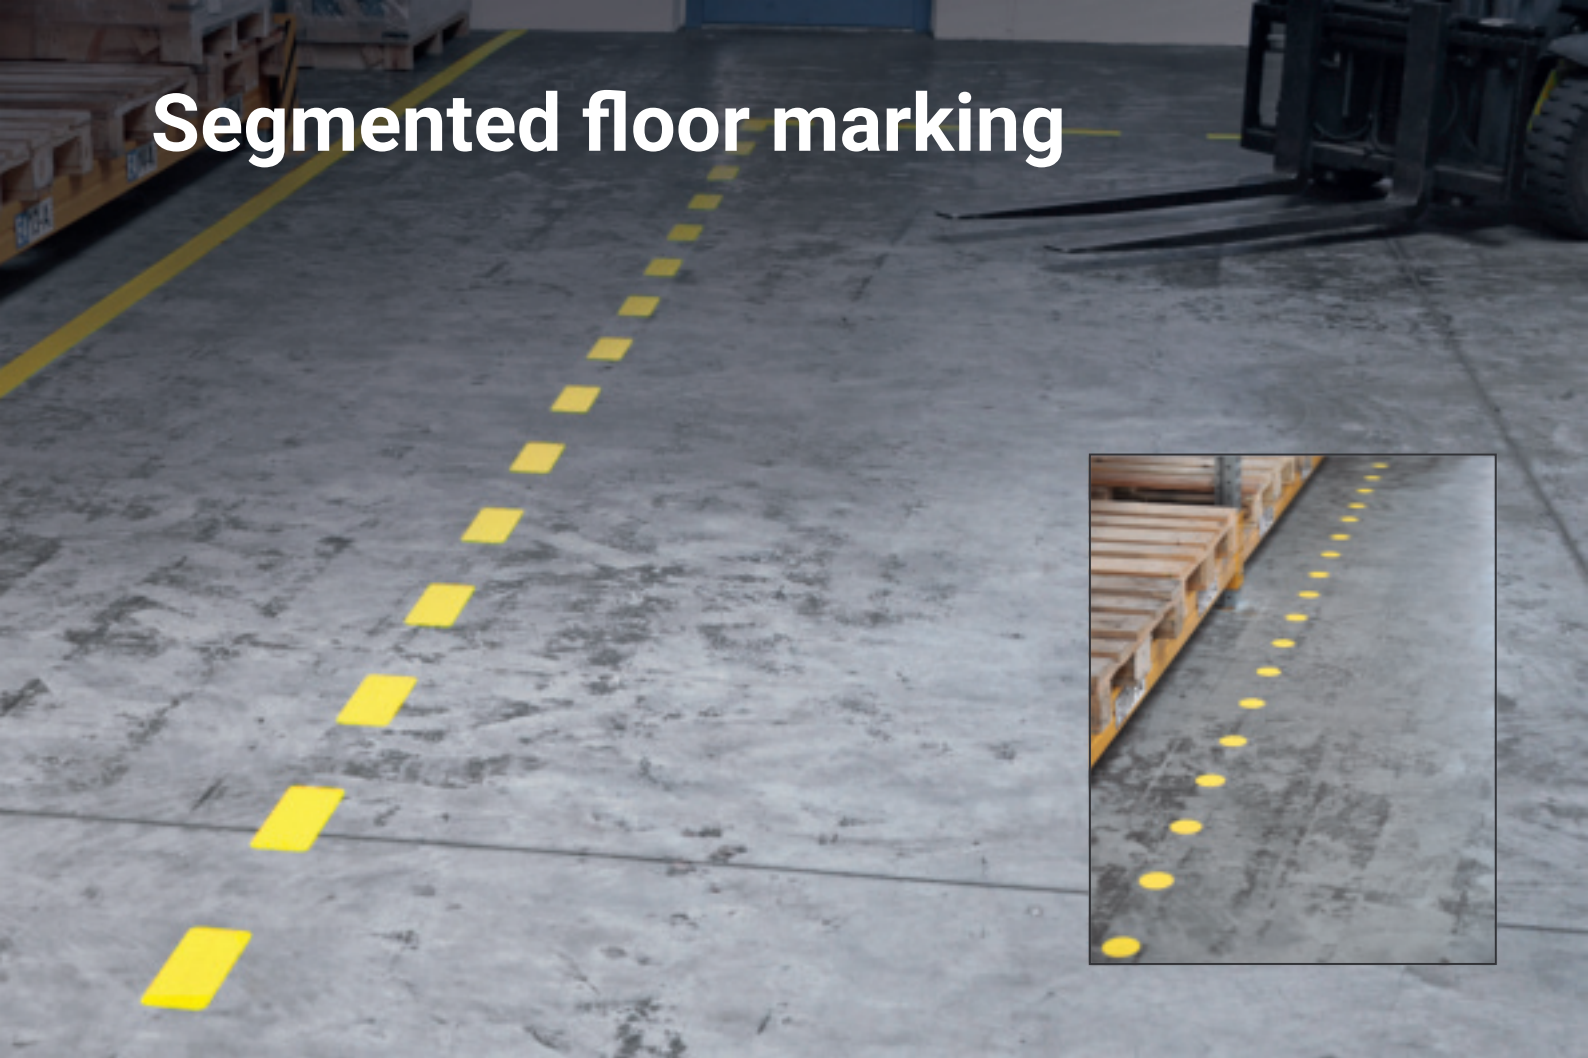

Universal segmented floor marking || WT-5126 / WT-5124

- | The ideal complement to the tape WT-5125
- | Suitable for smooth floors indoors


Material: PVC (like WT-5125)
Material thickness: 0.5 mm
Surface: matt
Slip class: /
Adhesive: permanent acrylate adhesive
Application area: inside

Points | WT-5126

Colour		50 mm x 25 m	50 mm x 10 m	75 mm x 25 m	75 mm x 10 m	PU
yellow		5126.04.050	5126.04.050-10	5126.04.075	5126.04.075-10	1
red		5126.01.050	5126.01.050-10	5126.01.075	5126.01.075-10	1
blue		5126.10.050	5126.10.050-10	5126.10.075	5126.10.075-10	1
green		5126.02.050	5126.02.050-10	5126.02.075	5126.02.075-10	1
white		5126.08.050	5126.08.050-10	5126.08.075	5126.08.075-10	1
black		5126.07.050	5126.07.050-10	5126.07.075	5126.07.075-10	1

Strips | WT-5124

Colour		50 mm x 25 m	50 mm x 10 m	75 mm x 25 m	75 mm x 10 m	PU
yellow		5124.04.050	5124.04.050-10	5124.04.075	5124.04.075-10	1
red		5124.01.050	5124.01.050-10	5124.01.075	5124.01.075-10	1
blue		5124.10.050	5124.10.050-10	5124.10.075	5124.10.075-10	1
green		5124.02.050	5124.02.050-10	5124.02.075	5124.02.075-10	1
white		5124.08.050	5124.08.050-10	5124.08.075	5124.08.075-10	1
black		5124.07.050	5124.07.050-10	5124.07.075	5124.07.075-10	1

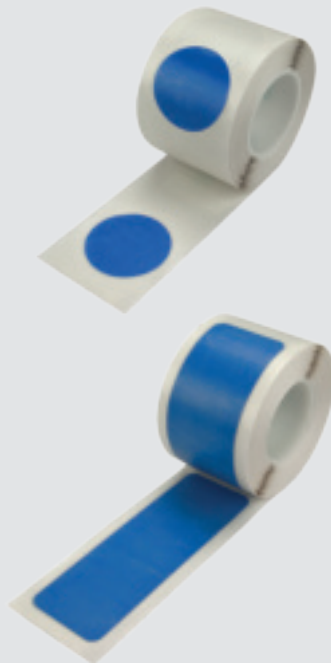


NEW Floor marking strips and points


The alternative to continuous marking tape

- | Fast replacement of damaged points
- | Time and cost saving
- | Ideal for heavy use
- | Simple bonding due to mounting foil
- | Very good floor bond
- | Suitable for smooth floors indoors


Distance of the points



Distance of the strips

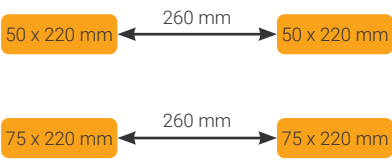

Easy laying of rolls

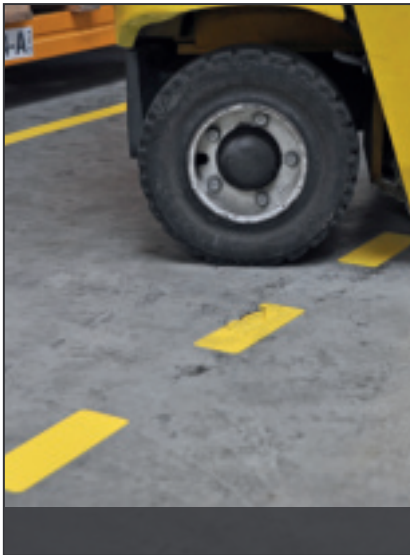

Fast replacement in case of damage

Dirt repellent segmented floor marking || WT-5226 / WT-5224

- | The ideal complement to the tape WT-5229
- | Suitable for smooth floors indoors


Material: Polyester (like WT-5229)
Material thickness: 0.2 mm Extra thin and tear-resistant
Surface: glossy
Slip class: /
Adhesive: permanent or removable acrylate adhesive
Application area: inside

Points | WT-5226

Colour		Permanent adhesive		Removable adhesive		PU
		50 mm x 25 m	75 mm x 25 m	50 mm x 25 m	75 mm x 25 m	
yellow		5226.04.050	5226.04.075	5226.1.04.050	5226.1.04.075	1
red		5226.01.050	5226.01.075	5226.1.01.050	5226.1.01.075	1
blue		5226.10.050	5226.10.075	5226.1.10.050	5226.1.10.075	1
green		5226.02.050	5226.02.075	5226.1.02.050	5226.1.02.075	1
white		5226.08.050	5226.08.075	5226.1.08.050	5226.1.08.075	1
black		5226.07.050	5226.07.075	5226.1.07.050	5226.1.07.075	1

Strips | WT-5224

Colour		Permanent adhesive		Removable adhesive		PU
		50 mm x 25 m	75 mm x 25 m	50 mm x 25 m	75 mm x 25 m	
yellow		5224.04.050	5224.04.075	5224.1.04.050	5224.1.04.075	1
red		5224.01.050	5224.01.075	5224.1.01.050	5224.1.01.075	1
blue		5224.10.050	5224.10.075	5224.1.10.050	5224.1.10.075	1
green		5224.02.050	5224.02.075	5224.1.02.050	5224.1.02.075	1
white		5224.08.050	5224.08.075	5224.1.08.050	5224.1.08.075	1
black		5224.07.050	5224.07.075	5224.1.07.050	5224.1.07.075	1

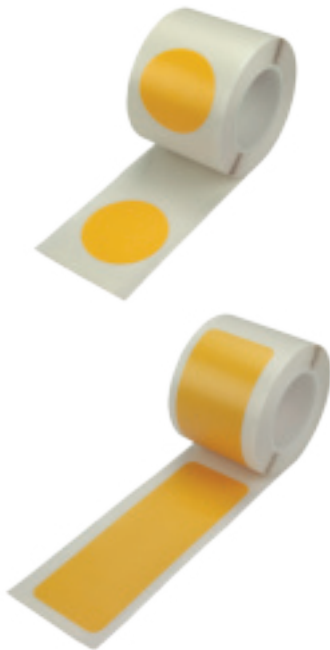

Floor marking & labels

For structured and clean marking



Floor marking signs

- For marking warehouse and storage locations
- Individual and scratch-resistant print
- Wear-resistant and high resistance with permanent load
- Suitable for smooth floors indoors

Material: Polycarbonate
Material thickness: 0.7 mm
Surface: matt
Slip class: /
Adhesive: permanent acrylate adhesive
Application area: inside



Colour		100 mm x 120 mm (HxW)	100 mm x 180 mm (HxW)	100 mm x 300 mm (HxW)	150 mm x 200 mm (HxW)	200 mm x 300 mm (HxW)	PU
yellow/black		LB47.CA01.100-120	LB47.CA01.100-180	LB47.CA01.100-300	LB47.CA01.150-200	LB47.CA01.200-300	1
white/black		LB87.CA01.100-120	LB87.CA01.100-180	LB87.CA01.100-300	LB87.CA01.150-200	LB87.CA01.200-300	1
red/white		LB18.CA01.100-120	LB18.CA01.100-180	LB18.CA01.100-300	LB18.CA01.150-200	LB18.CA01.200-300	1


Other sizes, colours or materials on request - we will advise you on your individual solution!

Labelling pockets

For exchangeable or fixed labelling

- Ideal for frequently changing lettering
- Open for interchangeable labelling
- Closed to protect against moisture
- Easy and fast bonding
- Very good floor bond
- Suitable for smooth floors indoors

Material: PVC
Material thickness: 1.2 mm
Surface: slightly glossy
Slip class: /
Adhesive: permanent acrylate adhesive
Application area: inside

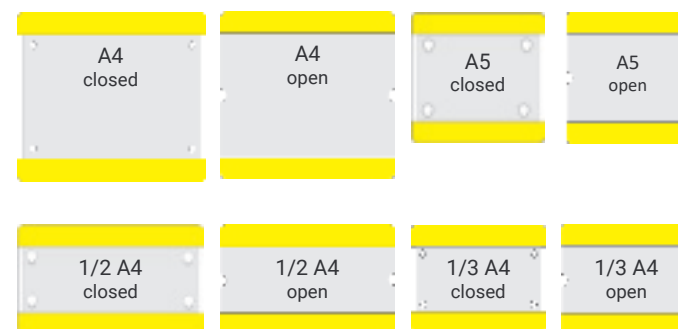

Colour		A4 closed 323mm x 290mm	A4 open 302mm x 290mm	A5 closed 236mm x 231mm	A5 open 216mm x 231mm	1/2 A4 closed 323mm x 187mm	1/2 A4 open 303mm x 187mm	1/3 A4 closed 236mm x 180mm	1/3 A4 open 216mm x 180mm	PU
yellow		5118.04.1-A4	5118.04.0-A4	5118.04.1-A5	5118.04.0-A5	5118.04.2-A4	5118.04.5-A4	5118.04.3-A4	5118.04.4-A4	10
red		5118.01.1-A4	5118.01.0-A4	5118.01.1-A5	5118.01.0-A5	5118.01.2-A4	5118.01.5-A4	5118.01.3-A4	5118.01.4-A4	10
blue		5118.10.1-A4	5118.10.0-A4	5118.10.1-A5	5118.10.0-A5	5118.10.2-A4	5118.10.5-A4	5118.10.3-A4	5118.10.4-A4	10
green		5118.02.1-A4	5118.02.0-A4	5118.02.1-A5	5118.02.0-A5	5118.02.2-A4	5118.02.5-A4	5118.02.3-A4	5118.02.4-A4	10
orange		5118.12.1-A4	5118.12.0-A4	5118.12.1-A5	5118.12.0-A5	5118.12.2-A4	5118.12.5-A4	5118.12.3-A4	5118.12.4-A4	10
white		5118.08.1-A4	5118.08.0-A4	5118.08.1-A5	5118.08.0-A5	5118.08.2-A4	5118.08.5-A4	5118.08.3-A4	5118.08.4-A4	10
light grey		5118.06.1-A4	5118.06.0-A4	5118.06.1-A5	5118.06.0-A5	5118.06.2-A4	5118.06.5-A4	5118.06.3-A4	5118.06.4-A4	10
dark grey		5118.11.1-A4	5118.11.0-A4	5118.11.1-A5	5118.11.0-A5	5118.11.2-A4	5118.11.5-A4	5118.11.3-A4	5118.11.4-A4	10
black		5118.07.1-A4	5118.07.0-A4	5118.07.1-A5	5118.07.0-A5	5118.07.2-A4	5118.07.5-A4	5118.07.3-A4	5118.07.4-A4	10

Durable pictograms || WT-5811

- Retro reflective and anti-slip R11 surface
- Extremely wear-resistant and strongly adhesive

Material: PU
Material thickness: 1.6 mm
Surface: retroreflective
Slip class: R11
Adhesive: permanent synthetic rubber
Application area: for indoors and outdoors

i Laying instructions: outside, pre-treat the substrate with Primer No. 5.

Colour	PU	Pedestrians 600 x 330 mm	Foot print 297 x 110 mm
		1 piece	5 pair
yellow		5811.04.101	5811.04.121
white		5811.08.101	5811.08.121



Removable pictograms || WT-6128

- Residue-free removable

Material: PVC
Material thickness: 0.3 mm
Surface: matt
Slip class: R9
Adhesive: removable acrylate adhesive
Application area: for indoors

Colour	PU	Pedestrians 600 x 330 mm	Foot print 297 x 110 mm
		1 piece	5 pair
yellow		6128.04.B101	6128.04.B121
red		6128.01.B101	6128.01.B121
blue		6128.10.B101	6128.10.B121
green		6128.02.B101	6128.02.B121
white		6128.08.B101	6128.08.B121



Storage location marker | WT-5210 / 7110 / 5110 / 5610

For fast and structured marking of storage locations

- Different materials for different requirements
- High resistance and strong adhesion
- Suitable for various indoor floors

Material: Polyester (like tape WT-5229)
Material thickness: 0.2 mm
Surface: glossy
Adhesive: permanent acrylate adhesive
Ground: for smooth and gap-free grounds

Material: Polycarbonate
Material thickness: 0.7 mm
Surface: matt
Adhesive: permanent acrylate adhesive
Ground: for smooth and gap-free grounds

Material: PVC (like tape WT-5125)
Material thickness: 0.5 mm
Surface: matt
Adhesive: permanent acrylate adhesive
Ground: for smooth and gap-free grounds

Material: coated aluminium (like tape WT-5645)
Material thickness: 0.6 mm
Surface: Anti-slip R11 - slightly glossy
Adhesive: extra permanent synthetic rubber
Ground: for rough and granulated grounds



L-piece		Polyester – WT-5210		Polycarbonate – WT-7110		PVC – WT-5110		Soft aluminium – WT-5610		PU
		50 mm	75 mm	50 mm	75 mm	50 mm	75 mm	50 mm	75 mm	
yellow		5210.04.060	5210.04.063	7110.04.060	7110.04.063	5110.04.060	5110.04.063	5610.04.060	5610.04.063	25
red		5210.01.060	5210.01.063	7110.01.060	7110.01.063	5110.01.060	5110.01.063	---	---	25
blue		5210.10.060	5210.10.063	7110.10.060	7110.10.063	5110.10.060	5110.10.063	---	---	25
green		5210.02.060	5210.02.063	7110.02.060	7110.02.063	5110.02.060	5110.02.063	---	---	25
white		5210.08.060	5210.08.063	7110.08.060	7110.08.063	5110.08.060	5110.08.063	5610.08.060	5610.08.063	25
yellow/black		5210.17.060	5210.17.063	7110.17.060	7110.17.063	---	---	---	---	25

T-piece		Polyester – WT-5210		Polycarbonate – WT-7110		PVC – WT-5110		Soft aluminium – WT-5610		PU
		50 mm	75 mm	50 mm	75 mm	50 mm	75 mm	50 mm	75 mm	
yellow		5210.04.061	5210.04.065	7110.04.061	7110.04.065	5110.04.061	5110.04.065	5610.04.061	5610.04.065	25
red		5210.01.061	5210.01.065	7110.01.061	7110.01.065	5110.01.061	5110.01.065	---	---	25
blue		5210.10.061	5210.10.065	7110.10.061	7110.10.065	5110.10.061	5110.10.065	---	---	25
green		5210.02.061	5210.02.065	7110.02.061	7110.02.065	5110.02.061	5110.02.065	---	---	25
white		5210.08.061	5210.08.065	7110.08.061	7110.08.065	5110.08.061	5110.08.065	5610.08.061	5610.08.065	25
yellow/black		5210.17.061	5210.17.065	7110.17.061	7110.17.065	---	---	---	---	25

X-piece		Polyester – WT-5210		Polycarbonate – WT-7110		PVC – WT-5110		Soft aluminium – WT-5610		PU
		50 mm	75 mm	50 mm	75 mm	50 mm	75 mm	50 mm	75 mm	
yellow		5210.04.062	5210.04.064	7110.04.062	7110.04.064	5110.04.062	5110.04.064	5610.04.062	5610.04.064	25
red		5210.01.062	5210.01.064	7110.01.062	7110.01.064	5110.01.062	5110.01.064	---	---	25
blue		5210.10.062	5210.10.064	7110.10.062	7110.10.064	5110.10.062	5110.10.064	---	---	25
green		5210.02.062	5210.02.064	7110.02.062	7110.02.064	5110.02.062	5110.02.064	---	---	25
white		5210.08.062	5210.08.064	7110.08.062	7110.08.064	5110.08.062	5110.08.064	5610.08.062	5610.08.064	25
yellow/black		5210.17.062	5210.17.064	7110.17.062	7110.17.064	---	---	---	---	25

Stripe piece		Polyester – WT-5210		Polycarbonate – WT-7110		PVC – WT-5110		Soft aluminium – WT-5610		PU
		50 mm	75 mm	50 mm	75 mm	50 mm	75 mm	50 mm	75 mm	
yellow		5210.04.071	5210.04.073	7110.04.071	7110.04.073	5110.04.071	5110.04.073	5610.04.071	5610.04.073	25
red		5210.01.071	5210.01.073	7110.01.071	7110.01.073	5110.01.071	5110.01.073	---	---	25
blue		5210.10.071	5210.10.073	7110.10.071	7110.10.073	5110.10.071	5110.10.073	---	---	25
green		5210.02.071	5210.02.073	7110.02.071	7110.02.073	5110.02.071	5110.02.073	---	---	25
white		5210.08.071	5210.08.073	7110.08.071	7110.08.073	5110.08.071	5110.08.073	5610.08.071	5610.08.073	25
yellow/black		5210.17.071	5210.17.073	7110.17.071	7110.17.073	---	---	---	---	25

Circle		Polyester – WT-5210		Polycarbonate – WT-7110		PVC – WT-5110		Soft aluminium – WT-5610		PU
		50 mm	75 mm	50 mm	75 mm	50 mm	75 mm	50 mm	75 mm	
yellow		5210.04.069	5210.04.070	7110.04.069	7110.04.070	5110.04.069	5110.04.070	5610.04.069	5610.04.070	25
red		5210.01.069	5210.01.070	7110.01.069	7110.01.070	5110.01.069	5110.01.070	---	---	25
blue		5210.10.069	5210.10.070	7110.10.069	7110.10.070	5110.10.069	5110.10.070	---	---	25
green		5210.02.069	5210.02.070	7110.02.069	7110.02.070	5110.02.069	5110.02.070	---	---	25
white		5210.08.069	5210.08.070	7110.08.069	7110.08.070	5110.08.069	5110.08.070	5610.08.069	5610.08.070	25
yellow/black		5210.17.069	5210.17.070	7110.17.069	7110.17.070	---	---	---	---	25

Other colours and shapes available on request

Printed Storage location marker | WT-5210 / 7110

For the individual labelling of spaces

- Scratch-resistant print image
- High resistance and strong adhesion
- Suitable for smooth floors indoors

Material: Polyester (like tape WT-5229)
Material thickness: 0.2 mm
Surface: glossy
Adhesive: permanent acrylate adhesive
Ground: for smooth and gap-free grounds

Material: Polycarbonate
Material thickness: 0.7 mm
Surface: matt
Adhesive: permanent acrylate adhesive
Ground: for smooth and gap-free grounds




		Polyester – WT-5210				Polycarbonate – WT-7110			
		L-piece 50 mm	L-piece 75 mm	T-piece 50 mm	T-piece 75 mm	L-piece 50 mm	L-piece 75 mm	T-piece 50 mm	T-piece 75 mm
		Print area 90 x 40 mm	Print area 115 x 65 mm	Print area 140 x 40 mm	Print area 165 x 65 mm	Print area 90 x 40 mm	Print area 115 x 65 mm	Print area 140 x 40 mm	Print area 165 x 65 mm
Colour	PU	10 piece	10 piece	10 piece	10 piece	10 piece	10 piece	10 piece	10 piece
yellow		5210.04.B60	5210.04.B63	5210.04.B61	5210.04.B65	7110.04.B60	7110.04.B63	7110.04.B61	7110.04.B65
red		5210.01.B60	5210.01.B63	5210.01.B61	5210.01.B65	7110.01.B60	7110.01.B63	7110.01.B61	7110.01.B65
blue		5210.10.B60	5210.10.B63	5210.10.B61	5210.10.B65	7110.10.B60	7110.10.B63	7110.10.B61	7110.10.B65
green		5210.02.B60	5210.02.B63	5210.02.B61	5210.02.B65	7110.02.B60	7110.02.B63	7110.02.B61	7110.02.B65
white		5210.08.B60	5210.08.B63	5210.08.B61	5210.08.B65	7110.08.B60	7110.08.B63	7110.08.B61	7110.08.B65
black		5210.07.B60	5210.07.B63	5210.07.B61	5210.07.B65	7110.07.B60	7110.07.B63	7110.07.B61	7110.07.B65


i When ordering with a barcode, please indicate which barcode system you are using.

Dimension of storage location marker 50 mm and 75 mm

Side width 50 mm

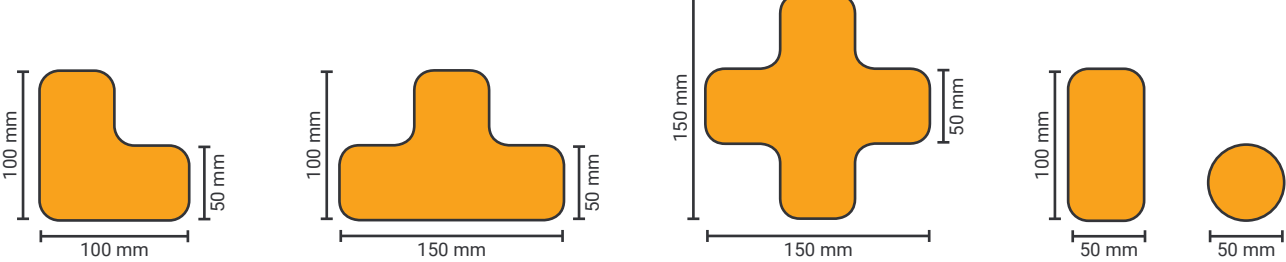

Side width 75 mm

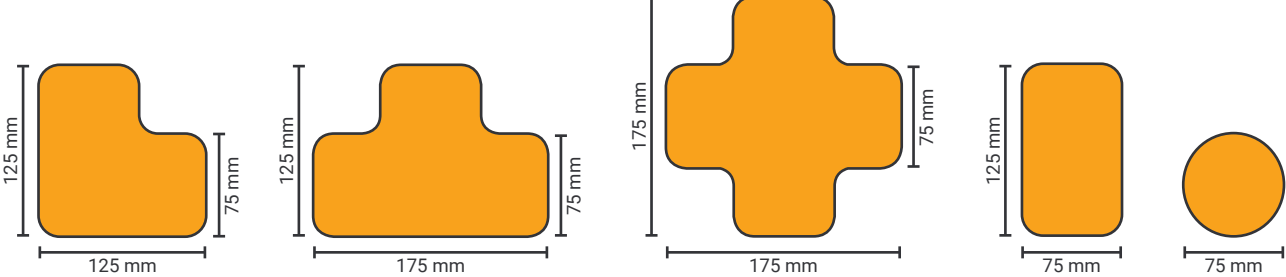

Deep-freeze labelling

NEW! Bonding during cooling mode

NEW Deep freeze labels

High quality labels for icy bonding



- | Ideal for applications in the freezer area
- | Bonding during cooling mode down to -20°C
- | Various design options
- | Different materials and sizes
- | Individualised with your logo
- | All barcode systems possible
- | Individual labels or sheets

Material: self-adhesive foil	Material: Magnetic foil
Material thickness: 0.1 mm	Material thickness: 1.5 mm
Surface: glossy	Surface: glossy
Adhesive: permanent acrylate adhesive	Application area: inside
Temp. resistance: - 40°C to + 90°C	Laminate: matt or glossy upon request
Application area: inside	
Laminate: matt or glossy upon request	



For more information or requests, please contact us.
Refer to page 46 in this catalogue. We will happily send you material samples before ordering.

NEW Floor marking tape - Freezer area || WT-5029 / WT-5020

The tape for a frosty environment



- | Ideal for ground markings in the freezer area
- | Bonding during cooling mode at up to -20°C
- | Easy to clean, extra thin and tear-resistant
- | Suitable for smooth floors indoors

WT-5029 | Standard

Material: self-adhesive plastic foil
Material thickness: 0.2 mm
Surface: glossy
Slip class: /
Adhesive: permanent acrylate adhesive
Temperature resistance: - 40°C to + 90°C
Application area: inside

WT-5020 | Anti-slip

Material: self-adhesive plastic foil
Material thickness: 0.4 mm
Surface: glossy
Slip class: R12 according to DIN 51130 / C according to DIN 51097
Adhesive: permanent acrylate adhesive
Temperature resistance: - 40°C to + 90°C
Application area: inside



Colour	WT-5029 Standard			WT-5020 Anti-slip			PU
	50 mm x 5 m	75 mm x 5 m	100 mm x 5 m	50 mm x 5 m	75 mm x 5 m	100 mm x 5 m	
yellow	5029.04.050-5	5029.04.075-5	5029.04.100-5	5020.04.050-5	5020.04.075-5	5020.04.100-5	1
red	5029.01.050-5	5029.01.075-5	5029.01.100-5	5020.01.050-5	5020.01.075-5	5020.01.100-5	1
blue	5029.10.050-5	5029.10.075-5	5029.10.100-5	5020.10.050-5	5020.10.075-5	5020.10.100-5	1
green	5029.02.050-5	5029.02.075-5	5029.02.100-5	5020.02.050-5	5020.02.075-5	5020.02.100-5	1
orange	5029.12.050-5	5029.12.075-5	5029.12.100-5	5020.12.050-5	5020.12.075-5	5020.12.100-5	1
white	5029.08.050-5	5029.08.075-5	5029.08.100-5	5020.08.050-5	5020.08.075-5	5020.08.100-5	1
black	5029.07.050-5	5029.07.075-5	5029.07.100-5	5020.07.050-5	5020.07.075-5	5020.07.100-5	1
yellow/black	5029.17.050-5	5029.17.075-5	5029.17.100-5	5020.17.050-5	5020.17.075-5	5020.17.100-5	1
red/white	5029.18.050-5	5029.18.075-5	5029.18.100-5	5020.18.050-5	5020.18.075-5	5020.18.100-5	1
black/white	5029.20.050-5	5029.20.075-5	5029.20.100-5	5020.20.050-5	5020.20.075-5	5020.20.100-5	1

Other lengths, widths, colours or individually printed for you - we are happy to advise you!

NEW Storage location marker - Freezer area || WT-5029

For fast and structured marking of storage locations



- | For marking pallet storage locations in the freezer area
- | Bonding during cooling mode at up to -20°C
- | Suitable for smooth floors indoors


WT-5029 | Standard

Material: self-adhesive plastic foil
Material thickness: 0.2 mm
Surface: glossy
Slip class: /
Adhesive: permanent acrylate adhesive
Temperature resistance: - 40°C to + 90°C
Application area: inside



Colour	PU	L-piece 50 mm	T-piece 50 mm	longitudinal piece 50 mm	Circle 50 mm
		25 piece	25 piece	25 piece	25 piece
yellow		5010.04.060	5010.04.061	5010.04.071	5010.04.069
red		5010.01.060	5010.01.061	5010.01.071	5010.01.069
blue		5010.10.060	5010.10.061	5010.10.071	5010.10.069
green		5010.02.060	5010.02.061	5010.02.071	5010.02.069
white		5010.08.060	5010.08.061	5010.08.071	5010.08.069

Dimension storage location marker 50 mm

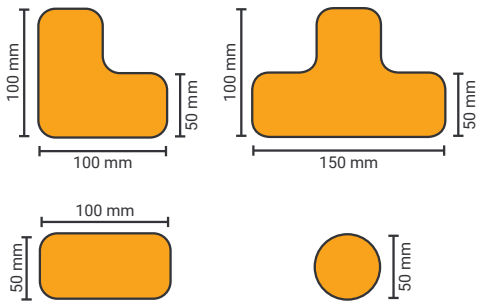

Optical tracking

For driverless driverless vehicles /AGV's



Optical tracking tape || WT-5128

This tape brings your goods to their destination




- Fast bonding of track
- Wear-resistant and high resistance with permanent load
- Very good floor bond
- Suitable for smooth floors indoors


Material: PVC
Material thickness: 0.5 mm
Surface: slightly glossy
Adhesive: permanent acrylate adhesive
Application area: inside



Plan your track with the following elements:

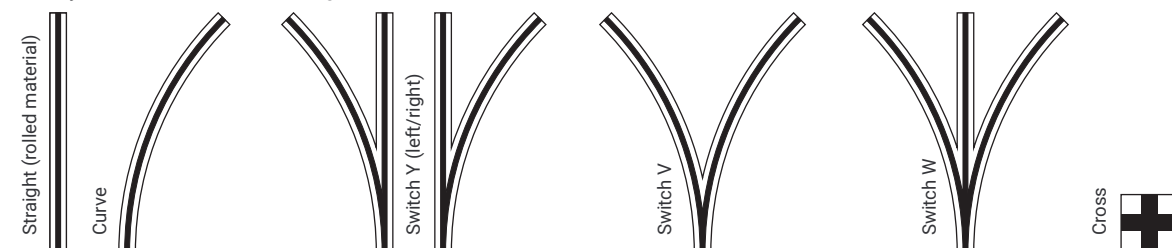

Create your own individual track network:

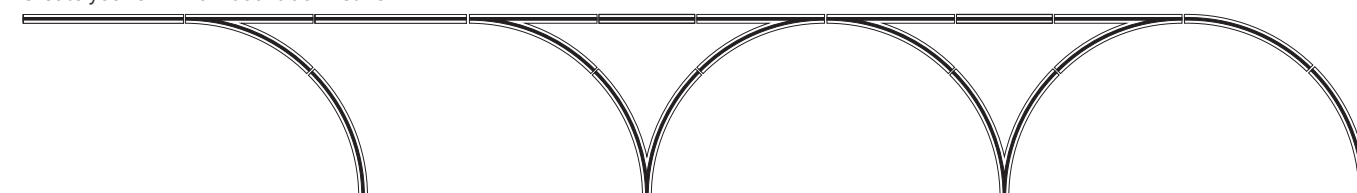

We produce your routes according to your request! Offers on request.

Magnetic tracking

For driverless driverless vehicles /AGV's



Magnetic tracking tape || WT-9228

This tape brings your goods to their destination



- Fast bonding of track nets
- Insensitive to dirt and unfavourable light conditions
- High flexibility and low costs for driving course changes
- Polarity and adhesion as required


North Pole | Standard

Material: Magnetic tape 1.0 mm
Magnetisation: North Pole
Adhesive: Acrylate adhesive for smooth and gap-free grounds
Overall thickness: 1.2 mm
Application area: inside




South Pole | Standard

Material: Magnetic tape 1.0 mm
Magnetisation: South Pole
Adhesive: Acrylate adhesive for smooth and gap-free grounds
Overall thickness: 1.2 mm
Application area: inside

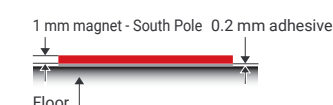


North Pole | Extra strong

Material: Magnetic tape 1.0 mm
Magnetisation: North Pole
Adhesive: stronger acrylate adhesive for difficult grounds
Overall thickness: 1.5 mm
Application area: inside

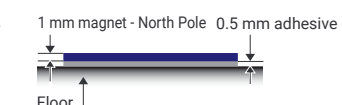


South Pole | Extra strong


Material: Magnetic tape 1.0 mm
Magnetisation: South Pole
Adhesive: stronger acrylate adhesive for difficult grounds
Overall thickness: 1.5 mm
Application area: inside

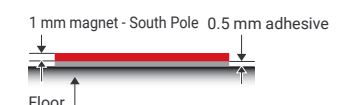

Plan your track with the following elements:

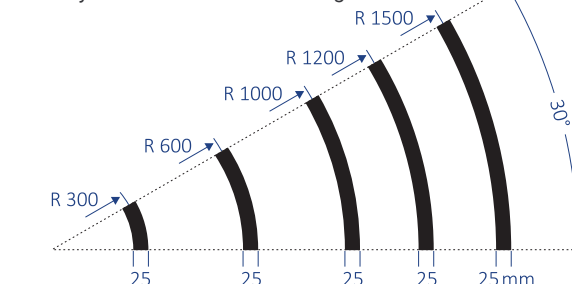

Create your own individual track network:

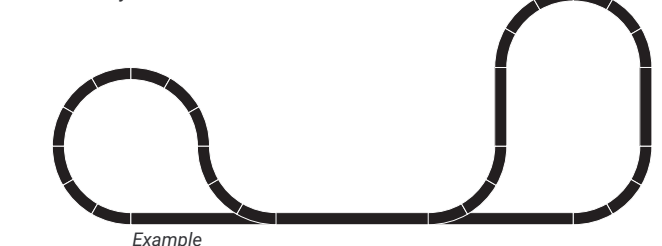

Example

Ground signs - Outdoor

For self-adhesive marking



NEW

Ground signs - Outdoor

Signs that are strongly connected to the ground

- Easy and fast bonding
- Wear-resistant and high resistance
- Very good floor bond
- Suitable for concrete paving and asphalt

Material: PVC
Material thickness: 1.3 mm
Surface: matt structured
Slip class: R11
Adhesive: permanent butyl adhesive
Application area: outside



Laying instructions: For outdoor areas, prime the substrate with Primer No. 5 and seal the edges with edge seal.

Primer No. 5

- Primer No. 5 increases the adhesive strength of a tape on critical surfaces
- ALWAYS required for outdoor use!



250 ml (0.75 m²)	1000 ml (3 m²)
3051.25.250	3051.25.1000

Pressure roller

- For pressing in profiled substrates
- For bubble-free pressing



Pressure roller	Item number
Silicone roller 45mm	8002.11.031

Edge sealing

- For sealing of edges
- Prevents penetration of moisture



Content: 140 ml for approx. 25 m

Edge sealing	Item number
140 ml	6090.20.140




Charging station 1 - white		
Height x Width	Item number	PU
400 x 400 mm	5415.08.1.04.B400	1
600 x 600 mm	5415.08.1.04.B600	1
800 x 800 mm	5415.08.1.04.B800	1



Charging station 2 - white		
Height x Width	Item number	PU
400 x 400 mm	5415.08.1.01.B400	1
600 x 600 mm	5415.08.1.01.B600	1
800 x 800 mm	5415.08.1.01.B800	1



Parking space P - white		
Height x Width	Item number	PU
400 x 400 mm	5415.08.1.06.B400	1
600 x 600 mm	5415.08.1.06.B600	1
800 x 800 mm	5415.08.1.06.B800	1



No stopping - white		
Height x Width	Item number	PU
400 x 400 mm	5415.08.1.07.B400	1
600 x 600 mm	5415.08.1.07.B600	1
800 x 800 mm	5415.08.1.07.B800	1



Charging station 1 - blue		
Height x Width	Item number	PU
400 x 400 mm	5415.10.1.04.B400	1
600 x 600 mm	5415.10.1.04.B600	1
800 x 800 mm	5415.10.1.04.B800	1



Charging station 2 - blue		
Height x Width	Item number	PU
400 x 400 mm	5415.10.1.01.B400	1
600 x 600 mm	5415.10.1.01.B600	1
800 x 800 mm	5415.10.1.01.B800	1



Parking space P - blue		
Height x Width	Item number	PU
400 x 400 mm	5415.10.1.06.B400	1
600 x 600 mm	5415.10.1.06.B600	1
800 x 800 mm	5415.10.1.06.B800	1



No stopping - blue		
Height x Width	Item number	PU
400 x 400 mm	5415.10.1.07.B400	1
600 x 600 mm	5415.10.1.07.B600	1
800 x 800 mm	5415.10.1.07.B800	1



Bicycle - white		
Height x Width	Item number	PU
400 x 400 mm	5415.08.1.05.B400	1
600 x 600 mm	5415.08.1.05.B600	1
800 x 800 mm	5415.08.1.05.B800	1



Family - white		
Height x Width	Item number	PU
400 x 400 mm	5415.08.1.03.B400	1
600 x 600 mm	5415.08.1.03.B600	1
800 x 800 mm	5415.08.1.03.B800	1



Wheelchair users - white		
Height x Width	Item number	PU
400 x 400 mm	5415.08.1.02.B400	1
600 x 600 mm	5415.08.1.02.B600	1
800 x 800 mm	5415.08.1.02.B800	1



Text and picto as desired - white		
Height x Width	Item number	PU
400 x 400 mm	5415.08.1.99.B400	1
600 x 600 mm	5415.08.1.99.B600	1
800 x 800 mm	5415.08.1.99.B800	1



Bicycle - blue		
Height x Width	Item number	PU
400 x 400 mm	5415.10.1.05.B400	1
600 x 600 mm	5415.10.1.05.B600	1
800 x 800 mm	5415.10.1.05.B800	1



Family - blue		
Height x Width	Item number	PU
400 x 400 mm	5415.10.1.03.B400	1
600 x 600 mm	5415.10.1.03.B600	1
800 x 800 mm	5415.10.1.03.B800	1



Wheelchair users - blue		
Height x Width	Item number	PU
400 x 400 mm	5415.10.1.02.B400	1
600 x 600 mm	5415.10.1.02.B600	1
800 x 800 mm	5415.10.1.02.B800	1



Text and picto as desired - blue		
Height x Width	Item number	PU
400 x 400 mm	5415.10.1.99.B400	1
600 x 600 mm	5415.10.1.99.B600	1
800 x 800 mm	5415.10.1.99.B800	1

Other sizes, colours, motifs or individually printed for you - we are happy to advise you!

Safety signs for the ground

Ensure more safety in your company



Safety signs

- Quick installation
- Extremely wear-resistant
- Good resistance
- PVC with slip resistance R11 according to DIN 51130
- Suitable for smooth grounds indoors and outdoors



Material: PC
Material thickness: 0.7 mm
Surface: semi-matt
Slip class: /
Adhesive: permanent acrylate adhesive
Application area: inside

Material: PVC
Material thickness: 1.0 mm
Surface: matt
Slip class: R11 according to DIN 51130
Adhesive: permanent acrylate adhesive
Application area: indoor and outdoor

i Installation instructions for outdoor areas: Pre-treat the substrate with Primer No. 5.
 Cover the edges with edge sealing to prevent moisture penetration

Primer No. 5

- Primer No. 5 increases the adhesion of a tape on critical surfaces
- ALWAYS required for outdoor use!

250 ml (0.75 m²)	1000 ml (3 m²)
3051.25.250	3051.25.1000



Edge sealing

- For sealing of edges
- Prevents penetration of moisture
- Enough for up to 25 metres

Edge sealing	Item number
140 ml	6090.20.140



General warning sign (ASR A1.3)

Material	Ø/mm	Item number	PU
PC	200	SW01.CA01.200	1
	400	SW01.CA01.400	1
	600	SW01.CA01.600	1
PVC	200	SW01.PA01.200	1
	400	SW01.PA01.400	1
	600	SW01.PA01.600	1
PVC	200	SW01.PA04.200	1
	400	SW01.PA04.400	1
	600	SW01.PA04.600	1



Warning of forklifts (ASR A1.3)

Material	Ø/mm	Item number	PU
PC	200	SW14.CA01.200	1
	400	SW14.CA01.400	1
	600	SW14.CA01.600	1
PVC	200	SW14.PA01.200	1
	400	SW14.PA01.400	1
	600	SW14.PA01.600	1
PVC	200	SW14.PA04.200	1
	400	SW14.PA04.400	1
	600	SW14.PA04.600	1



Warning of explosive atmosphere (ASR A1.3)

Material	Ø/mm	Item number	PU
PC	200	SW27.CA01.200	1
	400	SW27.CA01.400	1
	600	SW27.CA01.600	1
PVC	200	SW27.PA01.200	1
	400	SW27.PA01.400	1
	600	SW27.PA01.600	1
PVC	200	SW27.PA04.200	1
	400	SW27.PA04.400	1
	600	SW27.PA04.600	1



Risk of slipping warning (ASR A1.3)

Material	Ø/mm	Item number	PU
PC	200	SW11.CA01.200	1
	400	SW11.CA01.400	1
	600	SW11.CA01.600	1
PVC	200	SW11.PA01.200	1
	400	SW11.PA01.400	1
	600	SW11.PA01.600	1
PVC	200	SW11.PA04.200	1
	400	SW11.PA04.400	1
	600	SW11.PA04.600	1



Prohibited for forklift trucks (ASR A1.3)

Material	Ø/mm	Item number	PU
PC	200	SV01.CA01.200	1
	400	SV01.CA01.400	1
	600	SV01.CA01.600	1
PVC	200	SV01.PA01.200	1
	400	SV01.PA01.400	1
	600	SV01.PA01.600	1
PVC	200	SV01.PA04.200	1
	400	SV01.PA04.400	1
	600	SV01.PA04.600	1




No pedestrians allowed (ASR A1.3)

Material	Ø/mm	Item number	PU
PC	200	SV03.CA01.200	1
	400	SV03.CA01.400	1
	600	SV03.CA01.600	1
PVC	200	SV03.PA01.200	1
	400	SV03.PA01.400	1
	600	SV03.PA01.600	1
PVC	200	SV03.PA04.200	1
	400	SV03.PA04.400	1
	600	SV03.PA04.600	1



No admission for unauthorised person (ASR A1.3)

Material	Ø/mm	Item number	PU
PC	200	SV06.CA01.200	1
	400	SV06.CA01.400	1
	600	SV06.CA01.600	1
PVC	200	SV06.PA01.200	1
	400	SV06.PA01.400	1
	600	SV06.PA01.600	1
PVC	200	SV06.PA04.200	1
	400	SV06.PA04.400	1
	600	SV06.PA04.600	1



Deposit or storage of items strictly forbidden (ASR A1.3)

Material	Ø/mm	Item number	PU
PC	200	SV02.CA01.200	1
	400	SV02.CA01.400	1
	600	SV02.CA01.600	1
PVC	200	SV02.PA01.200	1
	400	SV02.PA01.400	1
	600	SV02.PA01.600	1
PVC	200	SV02.PA04.200	1
	400	SV02.PA04.400	1
	600	SV02.PA04.600	1



General mandatory sign (ASR A1.3)

Material	Ø/mm	Item number	PU
PC	200	SG17.CA01.200	1
	400	SG17.CA01.400	1
	600	SG17.CA01.600	1
PVC	200	SG17.PA01.200	1
	400	SG17.PA01.400	1
	600	SG17.PA01.600	1
PVC	200	SG17.PA04.200	1
	400	SG17.PA04.400	1
	600	SG17.PA04.600	1



Use pedestrian pathway (ASR A1.3)

Material	Ø/mm	Item number	PU
PC	200	SG16.CA01.200	1
	400	SG16.CA01.400	1
	600	SG16.CA01.600	1
PVC	200	SG16.PA01.200	1
	400	SG16.PA01.400	1
	600	SG16.PA01.600	1
PVC	200	SG16.PA04.200	1
	400	SG16.PA04.400	1
	600	SG16.PA04.600	1



Use head protection (ASR A1.3)

Material	Ø/mm	Item number	PU
PC	200	SG03.CA01.200	1
	400	SG03.CA01.400	1
	600	SG03.CA01.600	1
PVC	200	SG03.PA01.200	1
	400	SG03.PA01.400	1
	600	SG03.PA01.600	1
PVC	200	SG03.PA04.200	1
	400	SG03.PA04.400	1
	600	SG03.PA04.600	1



Use foot protection (ASR A1.3)

Material	Ø/mm	Item number	PU
PC	200	SG05.CA01.200	1
	400	SG05.CA01.400	1
	600	SG05.CA01.600	1
PVC	200	SG05.PA01.200	1
	400	SG05.PA01.400	1
	600	SG05.PA01.600	1
PVC	200	SG05.PA04.200	1
	400	SG05.PA04.400	1
	600	SG05.PA04.600	1

Safety signs for the ground

More safety with our new ground signs



Fire extinguisher - semicircle* Motif number SH01	Fire detector - semicircle* Motif number SH02	Escape route - semicircle* Motif number SH03	Escape route additional text - semicircle* Motif number SH04
Access forbidden - semicircle Motif number SH05	Parking prohibited - semicircle Motif number SH06	Warning of voltage - semicircle Motif number SH07	Warning sign - semicircle Motif number SH08
Eye and foot protection - semicircle Motif number SH10	Use eye protection - semicircle Motif number SH11	Use foot protection - semicircle Motif number SH12	Warning of lift truck - semicircle Motif number SH09

Include the motif number with the item number for the appropriate material: **SH01.PA01.750** (Example for "Fire extinguisher" - PVC 750 x 375 mm)

Material	Width x length	Item number	PU	Material	Width x length	Item number	PU
PVC	750 x 375 mm	----.PA01.750	1	Foil	750 x 375 mm	----.FK29.750	1
	900 x 450 mm	----.PA01.900	1		900 x 450 mm	----.FK29.900	1
PVC*	750 x 375 mm	----.FN33.750	1	Foils*	750 x 375 mm	----.FN23.750	1
photoluminescent	900 x 450 mm	----.FN33.900	1	photoluminescent	900 x 450 mm	----.FN23.900	1

* available in photoluminescent!

NEW Safety signs for passages and important areas

- Extra high luminance **200/25 mcd/m²** (10min/60min) according to DIN 67510 (Class C)
- Slip resistance R10/R11 according to DIN 51130
- The right variant for every requirement, customisable upon request
- Quick installation, good durability and extremely wear-resistant
- Suitable for smooth floors indoors

Material: PVC
Material thickness: 1.0 mm
Surface: matt
Slip class: R11 according to DIN 51130
Adhesive: permanent acrylate adhesive
Application area: inside
extremely wear-resistant and robust

Material: PVC luminescent
Material thickness: 1.2 mm
Surface: matt
Slip class: R11 according to DIN 51130
Adhesive: permanent acrylate adhesive
Application area: inside
extremely wear-resistant and robust

Material: Plastic foil
Material thickness: 0.3 mm
Surface: glossy
Slip class: R10 according to DIN 51130
Adhesive: permanent acrylate adhesive
Application area: inside
extra thin and easy to clean

Material: Plastic foil luminescent
Material thickness: 0.7 mm
Surface: glossy
Slip class: R10 according to DIN 51130
Adhesive: permanent acrylate adhesive
Application area: inside
easy to clean



Fire extinguisher - quarter circle Motif number SD01	Fire detector - quarter circle Motif number SD02	Parking prohibited - quarter circle Motif number SD03	Access forbidden - quarter circle Motif number SD04
Escape route door left - quarter circle Motif number SD05	Escape route door right - quarter circle Motif number SD06	Warning signs door opening - quarter circle Motif number SD07	Warning voltage - quarter circle Motif number SD08

Include the motif number with the item number for the appropriate material: **SD01.PA01.750** (Example for "Fire extinguisher" - PVC 750 x 750 mm)

Material	Width x length	Item number	PU	Material	Width x length	Item number	PU
PVC	750 x 750 mm	----.PA01.750	1	Foil	750 x 750 mm	----.FK29.750	1
	900 x 900 mm	----.PA01.900	1		900 x 900 mm	----.FK29.900	1

You have a difficult ground or want a different material texture?
Other versions on request - we happily advise you in choosing the right material!

Anti-slip solutions

Prevent slipping and falling accidents safely!



i Floor coverings are subdivided into 5 groups, with coverings with group R9 meet the lowest requirements for anti-slip properties and those with group R13 meet the highest requirements for anti-slip properties. [ASR A1.5/1,2](#)



Group R11
increased static friction coefficient
Non-slip up to 19° - 27° inclination
e.g. vehicle repair, beverage filling



Group R9
low friction coefficient
Non-slip up to 3° - 10° inclination
e.g. stairs, entrance area



Group R10
normal coefficient of static friction
Non-slip up to 10° - 19° inclination
e.g. sanitary rooms



Group R12
high coefficient of static friction
Non-slip up to 27° - 35° inclination
e.g. cold storage rooms, waste water treatment plants



Group R13
very high coefficient of static friction
Non-slip up to inclination > 35°
e.g. flow-through tank

Anti-slip tape – standard || WT-5411

The self-adhesive tape for versatile use

- Large variety of colours and individual widths possible
- Slip resistance R13 according to DIN 51130
- For medium to high loads
- Suitable for smooth grounds indoors and outdoors

Material: mineral granulation embedded in synthetic resin


Material thickness: 0.8 - 1.0 mm

Surface: rough

Slip class: R13

Adhesive: permanent acrylate adhesive

Application area: indoor and weather-protected outdoor area

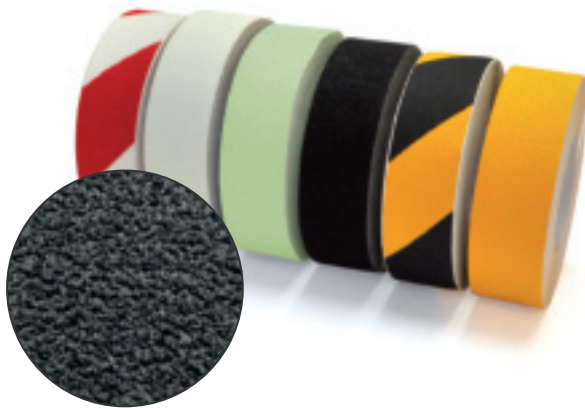

Colour	25 mm x 6 m	25 mm x 18 m	50 mm x 6 m	50 mm x 18 m	75 mm x 6 m	75 mm x 18 m	100 mm x 6 m	100 mm x 18 m	PU
yellow	5411.04.1025	5411.04.0025	5411.04.1050	5411.04.0050	5411.04.1075	5411.04.0075	5411.04.1100	5411.04.0100	1
yellow public	5411.47.1025	5411.47.0025	5411.47.1050	5411.47.0050	5411.47.1075	5411.47.0075	5411.47.1100	5411.47.0100	1
black	5411.07.1025	5411.07.0025	5411.07.1050	5411.07.0050	5411.07.1075	5411.07.0075	5411.07.1100	5411.07.0100	1
white	5411.08.1025	5411.08.0025	5411.08.1050	5411.08.0050	5411.08.1075	5411.08.0075	5411.08.1100	5411.08.0100	1
blue	5411.10.1025	5411.10.0025	5411.10.1050	5411.10.0050	5411.10.1075	5411.10.0075	5411.10.1100	5411.10.0100	1
light blue	5411.03.1025	5411.03.0025	5411.03.1050	5411.03.0050	5411.03.1075	5411.03.0075	5411.03.1100	5411.03.0100	1
green	5411.02.1025	5411.02.0025	5411.02.1050	5411.02.0050	5411.02.1075	5411.02.0075	5411.02.1100	5411.02.0100	1
brown	5411.05.1025	5411.05.0025	5411.05.1050	5411.05.0050	5411.05.1075	5411.05.0075	5411.05.1100	5411.05.0100	1
red	5411.01.1025	5411.01.0025	5411.01.1050	5411.01.0050	5411.01.1075	5411.01.0075	5411.01.1100	5411.01.0100	1
neon orange	5411.12.1025	5411.12.0025	5411.12.1050	5411.12.0050	5411.12.1075	5411.12.0075	5411.12.1100	5411.12.0100	1
transparent	5411.09.1025	5411.09.0025	5411.09.1050	5411.09.0050	5411.09.1075	5411.09.0075	5411.09.1100	5411.09.0100	1
photoluminescent	5416.04.1025	5416.04.0025	5416.04.1050	5416.04.0050	5416.04.1075	5416.04.0075	5416.04.1100	5416.04.0100	1
grey	5411.06.1025	5411.06.0025	5411.06.1050	5411.06.0050	5411.06.1075	5411.06.0075	5411.06.1100	5411.06.0100	1
yellow/black	5411.17.1025	5411.17.0025	5411.17.1050	5411.17.0050	5411.17.1075	5411.17.0075	5411.17.1100	5411.17.0100	1
red/white	5411.18.1025	5411.18.0025	5411.18.1050	5411.18.0050	5411.18.1075	5411.18.0075	5411.18.1100	5411.18.0100	1

i Laying instructions: outside, pre-treat the substrate with Primer No. 5.

NEW

Anti-slip tape – strips || WT-5411

The optimal solution for steps and stairs



- Slip resistance R13 according to DIN 51130
- For medium to high loads
- Suitable for smooth grounds indoors and outdoors

Material: mineral granulation embedded in synthetic resin


Material thickness: 0.8 - 1.0 mm

Surface: rough

Slip class: R13

Adhesive: permanent acrylate adhesive

Application area: indoor and weather-protected outdoor area

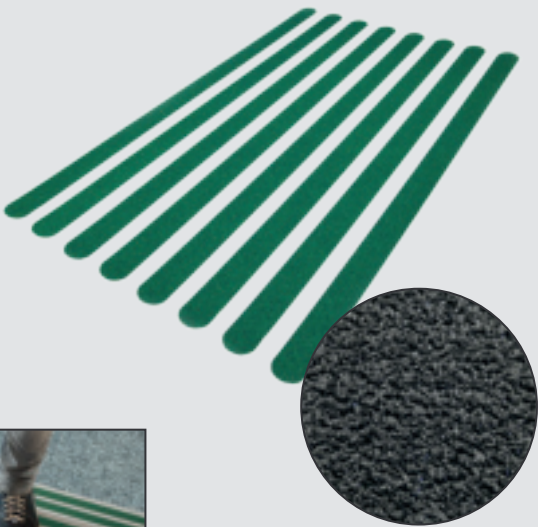

Colour		640 mm x 30 mm	PU
yellow public		ST11.002147.8.0364	8
black		ST11.002919.8.0364	8
blue		ST11.002515.8.0364	8
green		ST11.002618.8.0364	8
red		ST11.002303.8.0364	8
grey		ST11.002710.8.0364	8
photoluminescent		ST11.002027.8.0364	8



More colours on request

i Laying instructions: outside, pre-treat the substrate with Primer No. 5.

Anti-slip tape – extra rough || WT-5412

The self-adhesive tape with rough grain

- Slip resistance R13 according to DIN 51130
- Ideal for high pedestrian frequency or coarse soiling
- Suitable for smooth grounds indoors and outdoors

Material: mineral granulation embedded in synthetic resin


Material thickness: 1.4 - 1.6 mm

Surface: extra rough

Slip class: R13

Adhesive: permanent acrylate adhesive

Application area: indoor and weather-protected outdoor area

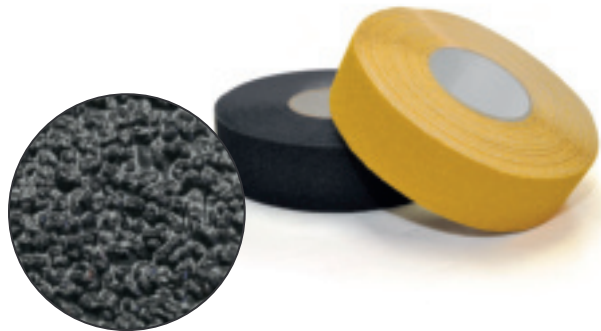

Colour	25 mm x 6 m	25 mm x 18 m	50 mm x 6 m	50 mm x 18 m	75 mm x 6 m	75 mm x 18 m	100 mm x 6 m	100 mm x 18 m	PU
yellow	5412.04.1025	5412.04.0025	5412.04.1050	5412.04.0050	5412.04.1075	5412.04.0075	5412.04.1100	5412.04.0100	1
black	5412.07.1025	5412.07.0025	5412.07.1050	5412.07.0050	5412.07.1075	5412.07.0075	5412.07.1100	5412.07.0100	1

i Laying instructions: outside, pre-treat the substrate with Primer No. 5.

Primer No. 5

- Primer No. 5 increases the adhesive strength of a tape on critical surfaces
- ALWAYS required for outdoor use!



250 ml (0.75 m²)	1000 ml (3 m²)
3051.25.250	3051.25.1000

Edge sealing

- For sealing of edges
- Prevents penetration of moisture
- Enough for up to 25 metres



Edge sealing	Item number
140 ml	6090.20.140

Stair edge profiles

The resistant solution for stairs




Anti-slip – stair edge profile | WT-5409

Durable solution for indoor and outdoor staircases


- | Slip and step protection - R13 according to DIN 51130
- | Flexible use: self-adhesive or screwable
- | Firm hold by screwing the profiles
- | For difficult, uneven, porous or dirty substrates
- | Suitable for stairs, ramps, platforms, ladders, etc.

Material: mineral granulation embedded in synthetic resin
Overall thickness: 2.0 mm (profile 1.2 mm)
Surface: rough
Slip class: R13
Adhesive: permanent acrylate adhesive
Application area: indoor and outdoor

Version: Narrow application
Anti-slip coating front:: 25 mm / top: 50 mm



Version: Wide application
Anti-slip coating front:: 25 mm / top: 100 mm

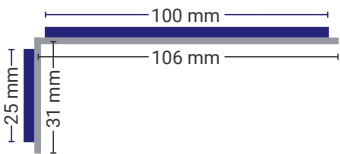

i All profiles are with self-adhesive tape and pre-punched, but not visibly Extinguisher equipped for screwing.



	Colour	Version	Length 600 mm	Length 800 mm	Length 1000 mm	PU
	black	narrow 25 mm x 50 mm	5409.01.050-600	5409.01.050-800	5409.01.050-1000	1
	black	wide 25 mm x 100 mm	5409.01.100-600	5409.01.100-800	5409.01.100-1000	1
	yellow/black	narrow 25 mm x 50 mm	5409.02.050-600	5409.02.050-800	5409.02.050-1000	1
	yellow/black	wide 25 mm x 100 mm	5409.02.100-600	5409.02.100-800	5409.02.100-1000	1
	public	narrow 25 mm x 50 mm	5409.03.050-600	5409.03.050-800	5409.03.050-1000	1
	public	wide 25 mm x 100 mm	5409.03.100-600	5409.03.100-800	5409.03.100-1000	1
	black/ photo-luminescent	narrow 25 mm x 50 mm	5409.04.050-600	5409.04.050-800	5409.04.050-1000	1
	black/ photo-luminescent	wide 25 mm x 100 mm	5409.04.100-600	5409.04.100-800	5409.04.100-1000	1
	photo-luminescent/ black	narrow 25 mm x 50 mm	5409.05.050-600	5409.05.050-800	5409.05.050-1000	1
	photo-luminescent/ black	wide 25 mm x 100 mm	5409.05.100-600	5409.05.100-800	5409.05.100-1000	1

Anti-slip tape – conformable | WT-5414

The malleable tape with rough grain

- | Slip resistance R13 according to DIN 51130
- | Particularly for uneven surfaces
- | Adapts to the profile of the substrate
- | Suitable for indoors and outdoors

Material: mineral granulation embedded in synthetic resin
Material thickness: 1.4 - 1.6 mm
Surface: rough
Slip class: R13
Adhesive: permanent acrylate adhesive
Application area: indoor and weather-protected outdoor area

Colour	25 mm x 6 m	25 mm x 18 m	50 mm x 6 m	50 mm x 18 m	PU
yellow	5414.04.1025	5414.04.0025	5414.04.1050	5414.04.0050	1
yellow/black	5414.17.1025	5414.17.0025	5414.17.1050	5414.17.0050	1
black	5414.07.1025	5414.07.0025	5414.07.1050	5414.07.0050	1

i Laying instructions: outside, pre-treat the substrate with Primer No. 5.



Floor marking tape with anti-slip surface plus | WT-5420

The extra thin tape for high demands


- | Suitable for wet and dry areas
- | Slip resistance R12 according to DIN 51130 / Class C according to DIN 51097
- | Extra thin and tear-resistant
- | Suitable for smooth floors indoors
- | Strips excellently suitable for public baths and showers

Material: Plastic foil
Material thickness: 0.3 mm
Surface: glossy
Slip class: R12 according to DIN 51130 / Class C according to DIN 51097
Adhesive: permanent or removable acrylate adhesive
Application area: inside



Colour	Permanent adhesive				Removable adhesive				PU
	50 mm x 10 m	75 mm x 10 m	100 mm x 10 m	Strips 640 mm x 30 mm	50 mm x 10 m	75 mm x 10 m	100 mm x 10 m	Strips 640 mm x 30 mm	
yellow	5420.04.050	5420.04.075	5420.04.100	5420.04.030-ST	5420.1.04.050	5420.1.04.075	5420.1.04.100	5420.1.04.030-ST	1
red	5420.01.050	5420.01.075	5420.01.100	5420.01.030-ST	5420.1.01.050	5420.1.01.075	5420.1.01.100	5420.1.01.030-ST	1
blue	5420.10.050	5420.10.075	5420.10.100	5420.10.030-ST	5420.1.10.050	5420.1.10.075	5420.1.10.100	5420.1.10.030-ST	1
green	5420.02.050	5420.02.075	5420.02.100	5420.02.030-ST	5420.1.02.050	5420.1.02.075	5420.1.02.100	5420.1.02.030-ST	1
orange	5420.12.050	5420.12.075	5420.12.100	5420.12.030-ST	5420.1.12.050	5420.1.12.075	5420.1.12.100	5420.1.12.030-ST	1
white	5420.08.050	5420.08.075	5420.08.100	5420.08.030-ST	5420.1.08.050	5420.1.08.075	5420.1.08.100	5420.1.08.030-ST	1
black	5420.07.050	5420.07.075	5420.07.100	5420.07.030-ST	5420.1.07.050	5420.1.07.075	5420.1.07.100	5420.1.07.030-ST	1
yellow/black	5420.17.050	5420.17.075	5420.17.100	5420.17.030-ST	5420.1.17.050	5420.1.17.075	5420.1.17.100	5420.1.17.030-ST	1
red/white	5420.18.050	5420.18.075	5420.18.100	5420.18.030-ST	5420.1.18.050	5420.1.18.075	5420.1.18.100	5420.1.18.030-ST	1
black/white	5420.20.050	5420.20.075	5420.20.100	5420.20.030-ST	5420.1.20.050	5420.1.20.075	5420.1.20.100	5420.1.20.030-ST	1

Other sizes, colours, forms or an individual contour cut - we happily advise you on your exclusive solution!

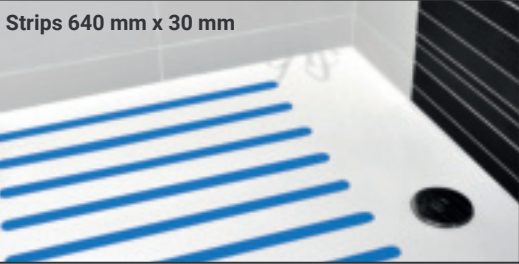

Orientation and signposting

Ensure more safety in your company

High luminescence
Photoluminescent 200/25 mcd/m² - Class C
ASR A3.4 / 7 at least prescribes: 80/12 mcd/m²

Photoluminescent marking || WT-5127

The ideal marker for glow in the dark

- Self-adhesive guide mark for wall and floor
- Extra high luminance **200/25 mcd/m² according to DIN 67510 (class C)**
- Current-independent, maintenance-free and fail-safe
- The right variant for every requirement

Material: PVC
Material thickness: 0.6 mm
Surface: glossy
Slip class: /
Adhesive: permanent acrylate adhesive
Application area: inside

Material: PVC with anti-slip surface
Material thickness: 1.0 mm
Surface: matt
Slip class: R11 according to DIN 51130
Adhesive: permanent acrylate adhesive
Application area: inside

Minimum luminance		
Class	According to 10 minutes	According to 60 minutes
A	23 mcd/m²	3 mcd/m²
B	50 mcd/m²	7 mcd/m²
C	140 mcd/m²	20 mcd/m²
D	260 mcd/m²	35 mcd/m²

mcd = Millicandela

You have a difficult ground or want a different material texture?
Other versions on request - we happily advise you in choosing the right material!



Marking tape

Material	Width x length	Item number	PU
PVC <i>smooth</i>	25 mm x 10 m	5127.29.025	1
	50 mm x 10 m	5127.29.050	1
	75 mm x 10 m	5127.29.075	1
PVC - R11 <i>Anti-slip</i>	25 mm x 10 m	5415.29.025	1
	50 mm x 10 m	5415.29.050	1
	75 mm x 10 m	5415.29.075	1

Marking tape with escape sign left

Material	Width x length	Item number	PU
PVC <i>smooth</i>	25 mm x 10 m	5127.3-Li.B25	1
	50 mm x 10 m	5127.3-Li.B50	1
	75 mm x 10 m	5127.3-Li.B75	1
PVC - R11 <i>Anti-slip</i>	25 mm x 10 m	5415.3-Li.B25	1
	50 mm x 10 m	5415.3-Li.B50	1
	75 mm x 10 m	5415.3-Li.B75	1

Marking tape with escape sign right

Material	Width x length	Item number	PU
PVC <i>smooth</i>	25 mm x 10 m	5127.3-Re.B25	1
	50 mm x 10 m	5127.3-Re.B50	1
	75 mm x 10 m	5127.3-Re.B75	1
PVC - R11 <i>Anti-slip</i>	25 mm x 10 m	5415.3-Re.B25	1
	50 mm x 10 m	5415.3-Re.B50	1
	75 mm x 10 m	5415.3-Re.B75	1

Marking tape with direction arrow green

Material	Width x length	Item number	PU
PVC <i>smooth</i>	25 mm x 10 m	5127.1-02.B25	1
	50 mm x 10 m	5127.1-02.B50	1
	75 mm x 10 m	5127.1-02.B75	1
PVC - R11 <i>Anti-slip</i>	25 mm x 10 m	5415.1-02.B25	1
	50 mm x 10 m	5415.1-02.B50	1
	75 mm x 10 m	5415.1-02.B75	1

Marking tape green

Material	Width x length	Item number	PU
PVC <i>smooth</i>	25 mm x 10 m	5127.19.B25	1
	50 mm x 10 m	5127.19.B50	1
	75 mm x 10 m	5127.19.B75	1
PVC - R11 <i>Anti-slip</i>	25 mm x 10 m	5415.1-19.B25	1
	50 mm x 10 m	5415.1-19.B50	1
	75 mm x 10 m	5415.1-19.B75	1

Marking tape with direction indication green

Material	Width x length	Item number	PU
PVC <i>smooth</i>	25 mm x 10 m	5127.2-02.B25	1
	50 mm x 10 m	5127.2-02.B50	1
	75 mm x 10 m	5127.2-02.B75	1
PVC - R11 <i>Anti-slip</i>	25 mm x 10 m	5415.2-02.B25	1
	50 mm x 10 m	5415.2-02.B50	1
	75 mm x 10 m	5415.2-02.B75	1

Marking tape with direction arrow black

Material	Width x length	Item number	PU
PVC <i>smooth</i>	25 mm x 10 m	5127.1-07.B25	1
	50 mm x 10 m	5127.1-07.B50	1
	75 mm x 10 m	5127.1-07.B75	1
PVC - R11 <i>Anti-slip</i>	25 mm x 10 m	5415.1-07.B25	1
	50 mm x 10 m	5415.1-07.B50	1
	75 mm x 10 m	5415.1-07.B75	1

Marking tape black

Material	Width x length	Item number	PU
PVC <i>smooth</i>	25 mm x 10 m	5127.17.B25	1
	50 mm x 10 m	5127.17.B50	1
	75 mm x 10 m	5127.17.B75	1
PVC - R11 <i>Anti-slip</i>	25 mm x 10 m	5415.1-17.B25	1
	50 mm x 10 m	5415.1-17.B50	1
	75 mm x 10 m	5415.1-17.B75	1

Marking tape with direction indication black

Material	Width x length	Item number	PU
PVC <i>smooth</i>	25 mm x 10 m	5127.2-07.B25	1
	50 mm x 10 m	5127.2-07.B50	1
	75 mm x 10 m	5127.2-07.B75	1
PVC - R11 <i>Anti-slip</i>	25 mm x 10 m	5415.2-07.B25	1
	50 mm x 10 m	5415.2-07.B50	1
	75 mm x 10 m	5415.2-07.B75	1

Stair markers

Material	Width x length	Item number	PU
PVC <i>smooth</i>	37 mm x 160 mm	5127.Wi11.37	5
	47 mm x 160 mm	5127.Wi11.47	5
PVC - R11 <i>Anti-slip</i>	37 mm x 160 mm	5415.Wi11.37	5
	47 mm x 160 mm	5415.Wi11.47	5

Round blanks

Material	Size Ø	Item number	PU
PVC <i>smooth</i>	50 mm	5127.L72-50	10
	75 mm	5127.L72-75	10
PVC - R11 <i>Anti-slip</i>	50 mm	5415.L72-50	10
	75 mm	5415.L72-75	10

Arrows

Material	Width x length	Item number	PU
PVC <i>smooth</i>	90 mm x 145 mm	5127.00.003	10
	90 mm x 145 mm	5415.00.003	10

Orientation and signposting

Ensure more safety in your company



Escape route straight ahead,
through the door, go up (ASR A1.3)
Motif number | **SR40**



Escape route go downwards
(ASR A1.3)
Motif number | **SR43**



Escape route go left
(ASR A1.3)
Motif number | **SR41**



Escape route go right
(ASR A1.3)
Motif number | **SR44**



Escape route go left downwards
(ASR A1.3)
Motif number | **SR45**



Escape route go left upwards
(ASR A1.3)
Motif number | **SR42**



Escape route go right upwards
(ASR A1.3)
Motif number | **SR47**



Escape route go right downwards
(ASR A1.3)
Motif number | **SR46**

Include the motif number with the item number for the appropriate material: **SR40.FAB99.150** (Example for "Escape route straight ahead" - Foil 150 x 300 mm)

Material	Width x length	Item number	PU	Material	Width x length	Item number	PU	Material	Width x length	Item number	PU
Foil	150 x 300 mm	----.FAB99.150	1	Alu. composite 2 mm	150 x 300 mm	----.DA90.150	1	Plastic 1 mm	150 x 300 mm	----.PE00.150	1
	200 x 400 mm	----.FAB99.200	1		200 x 400 mm	----.DA90.200	1		200 x 400 mm	----.PE00.200	1
Foil photoluminescent	150 x 300 mm	----.FN81.150	1	Alu. composite photoluminescent	150 x 300 mm	----.DAN80.150	1	Plastic photoluminescent	150 x 300 mm	----.PEN90.150	1
	200 x 400 mm	----.FN81.200	1		200 x 400 mm	----.DAN80.200	1		200 x 400 mm	----.PEN90.200	1

Escape signs

Proper signage – since correct signing can save lives

- Extra high luminance **200/25 mcd/m²** (10min/60min) **according to DIN 67510 (Class C)**
- Current-independent, maintenance-free and fail-safe
- The right variant for every requirement
- Customisable upon request

Material: Foil 0.1 mm
Luminescent foil 0.7 mm
Surface: glossy
Assembly:
self-adhesive
Application area:
for smooth and gap-free substrates

Material: Aluminium composite 2.0 mm
Luminescent aluminium composite 2.7 mm
Surface: glossy
Assembly:
with self-adhesive or screw-in accessories
Application area:
for wall mounting indoors and outdoors

Material: Plastic 1.0 mm
Luminescent plastic 1.7 mm
Surface: glossy
Assembly:
with self-adhesive or screw-in accessories
Application area:
for wall mounting indoors

i In accordance with ASR A1.3 and 2.3, escape routes must be equipped with long photoluminescent escape signs if no emergency lighting is available.



Exit
(tried in practice)
Motif number | **SR19**



Emergency exit
(tried in practice)
Motif number | **SR50**



Emergency exit
(tried in practice)
Motif number | **SR20**



Emergency ladder
(tried in practice)
Motif number | **SR21**

Include the motif number with the item number for the appropriate material: **SR19.FAB99.105** (Example for "Exit" - Foil 105 x 300 mm)


Material	Width x length	Item number	PU	Material	Width x length	Item number	PU	Material	Width x length	Item number	PU
Foil	105 x 300 mm	----.FAB99.105	1	Alu. composite 2 mm	105 x 300 mm	----.DA90.105	1	Plastic 1 mm	105 x 300 mm	----.PE00.105	1
	140 x 400 mm	----.FAB99.140	1		140 x 400 mm	----.DA90.140	1		140 x 400 mm	----.PE00.140	1
Foil photoluminescent	105 x 300 mm	----.FN81.105	1	Alu. composite photoluminescent	105 x 300 mm	----.DAN80.105	1	Plastic photoluminescent	105 x 300 mm	----.PEN90.105	1
	140 x 400 mm	----.FN81.140	1		140 x 400 mm	----.DAN80.140	1		140 x 400 mm	----.PEN90.140	1




Escape route left
(ASR A1.3)
Motif number | **SR01**




Escape route right
(ASR A1.3)
Motif number | **SR02**



Direction indication (ASR A1.3)
Only in conjunction with one
other escape sign
Motif number | **SR03**




Direction indication (ASR A1.3)
Only in conjunction with one
other escape sign
Motif number | **SR06**



Assembly point
(ASR A1.3)
Motif number | **SR08**



Eye wash equipment
(ASR A1.3)
Motif number | **SR14**



Emergency shower
(ASR A1.3)
Motif number | **SR13**



Stretcher
(ASR A1.3)
Motif number | **SR11**



Emergency telephone
(ASR A1.3)
Motif number | **SR10**



First aid
(ASR A1.3)
Motif number | **SR07**

Include the motif number with the item number for the appropriate material: **SR01.FAB99.100** (Example for "Escape route left" - Foil 100 mm)

Material	Width x length	Item number	PU	Material	Width x length	Item number	PU	Material	Width x length	Item number	PU
Foil	100 x 100 mm	----.FAB99.100	1	Foil photoluminescent	100 x 100 mm	----.FN81.100	1	Angular signs	150 x 150 mm	----.PEG00.150-150	1
	150 x 150 mm	----.FAB99.150	1		150 x 150 mm	----.FN81.150	1		200 x 200 mm	----.PEG00.200-200	1
	200 x 200 mm	----.FAB99.200	1		200 x 200 mm	----.FN81.200	1	Angular signs photoluminescent	150 x 150 mm	----.PENG90.150-150	1
Alu. composite 2 mm	100 x 100 mm	----.DA90.100	1	Alu. composite 2 mm photoluminescent	100 x 100 mm	----.DAN80.100	1		200 x 200 mm	----.PENG90.200-200	1
	150 x 150 mm	----.DA90.150	1		150 x 150 mm	----.DAN80.150	1	Protruding signs	150 x 150 mm	----.PEH00.150-150	1
	200 x 200 mm	----.DA90.200	1		200 x 200 mm	----.DAN80.200	1		200 x 200 mm	----.PEH00.200-200	1
Plastic 1 mm	100 x 100 mm	----.PE00.100	1	Plastic 1 mm photoluminescent	100 x 100 mm	----.PEN90.100	1	Protruding signs photoluminescent	150 x 150 mm	----.PENH90.150-150	1
	150 x 150 mm	----.PE00.150	1		150 x 150 mm	----.PEN90.150	1		200 x 200 mm	----.PENH90.200-200	1
	200 x 200 mm	----.PE00.200	1		200 x 200 mm	----.PEN90.200	1	Angular and protruding signs made of plastic 1 mm			

Orientation and signposting

Ensure more safety in your company



Fire protection door Fire protection door (DIN 4066) Motif number SB40	Fire protection door Fire protection door distribution, adjustment etc. strictly forbidden! Motif number SB42	FACP FACP (DIN 4066) Motif number SB45
Fire-resistant door Fire-resistant door distribution, adjustment etc. strictly forbidden! Motif number SB41	Do not use lift Do not use lift in case of fire (DIN 4066) Motif number SB44	FACP → FACP direction (DIN 4066) Motif number SB46

Include the motif number with the item number for the appropriate material: **SR40.FAB99.150** (Example for "Escape route straight ahead" - Foil 150 x 300 mm)

Material	Width x length	Item number	PU	Material	Width x length	Item number	PU	Material	Width x length	Item number	PU
Foil	74 x 210 mm	----.FAB99.074	1	Alu. composite 2 mm	74 x 210 mm	----.DA90.074	1	Plastic 1 mm	74 x 210 mm	----.PE00.074	1
	105 x 297 mm	----.FAB99.105	1		105 x 297 mm	----.DA90.105	1		105 x 297 mm	----.PE00.105	1
	148 x 420 mm	----.FAB99.148	1		148 x 420 mm	----.DA90.148	1		148 x 420 mm	----.PE00.148	1
Foil photoluminescent	74 x 210 mm	----.FN81.074	1	Alu. composite 2 mm photoluminescent	74 x 210 mm	----.DAN80.074	1	Plastic 2 mm photoluminescent	74 x 210 mm	----.PEN90.074	1
	105 x 297 mm	----.FN81.105	1		105 x 297 mm	----.DAN80.105	1		105 x 297 mm	----.PEN90.105	1
	148 x 420 mm	----.FN81.148	1		148 x 420 mm	----.DAN80.148	1		148 x 420 mm	----.PEN90.148	1

Fire safety signs

Proper signage – since correct signing can save lives

- Extra high luminance **200/25 mcd/m²** (10min/60min) **according to DIN 67510 (Class C)**
- Current-independent, maintenance-free and fail-safe
- The right variant for every requirement
- Customisable upon request

Material: Foil 0.1 mm
Luminescent foil 0.7 mm
Surface: glossy
Assembly:
self-adhesive
Application area:
for smooth and gap-free substrates

Material: Aluminium composite 2.0 mm
Luminescent aluminium composite 2.7 mm
Surface: glossy
Assembly:
with self-adhesive or screw-in accessories
Application area:
for wall mounting indoors and outdoors

Material: Plastic 1.0 mm
Luminescent plastic 1.7 mm
Surface: glossy
Assembly:
with self-adhesive or screw-in accessories
Application area:
for wall mounting indoors

Screw set

- For wall mounting of signs, consisting of:
Screw (4x35mm), rosette, dowels

Screw set	Item number
Set of 4	8008.00.105



Adhesive pads

- For self-adhesive attachment of signs at suitable substrates

Adhesive pads	Item number
Set of 4	8008.00.106
Set of 8	8008.00.107



Fire extinguisher (ASR A1.3) Motif number SB01	Fire alarm (ASR A1.3) Motif number SB02	Fire alarm telephone (ASR A1.3) Motif number SB03	Fire hose (ASR A1.3) Motif number SB04	Means and equipment for fire fighting (ASR A1.3) Motif number SB05
Fire ladder (ASR A1.3) Motif number SB06	Direction indication (ASR A1.3) Only in conjunction with another fire safety sign Motif number SB07	Direction indication (ASR A1.3) Only in conjunction with another fire safety sign Motif number SB08	Angular and protruding signs protrude into the room space and increase the safety within your company.	

Include the motif number with the item number for the appropriate material: **SB01.FAB99.100** (Example for "Fire extinguisher" - Foil 100 mm)

Material	Width x length	Item number	PU	Material	Width x length	Item number	PU	Material	Width x length	Item number	PU
Foil	100 x 100 mm	----.FAB99.100	1	Foil photoluminescent	100 x 100 mm	----.FN81.100	1	Angular signs	150 x 150 mm	----.PEG00.150-150	1
	150 x 150 mm	----.FAB99.150	1		150 x 150 mm	----.FN81.150	1		200 x 200 mm	----.PEG00.200-200	1
	200 x 200 mm	----.FAB99.200	1		200 x 200 mm	----.FN81.200	1		150 x 150 mm	----.PENG90.150-150	1
Aluminium composite 2 mm	100 x 100 mm	----.DA90.100	1	Alu. composite 2 mm photoluminescent	100 x 100 mm	----.DAN80.100	1	Angular signs photoluminescent	200 x 200 mm	----.PENG90.200-200	1
	150 x 150 mm	----.DA90.150	1		150 x 150 mm	----.DAN80.150	1		150 x 150 mm	----.PEH00.150-150	1
	200 x 200 mm	----.DA90.200	1		200 x 200 mm	----.DAN80.200	1		200 x 200 mm	----.PEH00.200-200	1
Plastic 1 mm	100 x 100 mm	----.PE00.100	1	Plastic 1 mm photoluminescent	100 x 100 mm	----.PEN90.100	1	Protruding signs	150 x 150 mm	----.PENH90.150-150	1
	150 x 150 mm	----.PE00.150	1		150 x 150 mm	----.PEN90.150	1		200 x 200 mm	----.PENH90.200-200	1
	200 x 200 mm	----.PE00.200	1		200 x 200 mm	----.PEN90.200	1				

Angular and protruding signs made of plastic 1 mm

Prohibitory signs

Ensure more safety in your company

Prohibitory signs

- Marking according to current ASR A1.3
- For wall, ground or machine, the right variant for every requirement

For the ground	Material: Polycarbonate 0.7 mm Surface: matt Assembly: self-adhesive Application area: inside for smooth and clean grounds particularly robust and impact-resistant	Material: PVC indoor 1.0 mm Surface: slightly glossy Assembly: self-adhesive Application area: inside for different clean grounds non-slip surface R11	Material: PVC outdoor 1.1 mm Surface: slightly glossy Assembly: strong self-adhesive Application area: indoor and outdoor for different clean grounds non-slip surface R11
	Material: Foil 0.1 mm Surface: glossy Assembly: self-adhesive Application area: inside for smooth and clean substrates e.g. on doors or machines	Material: Plastic 1.0 mm Surface: slightly glossy Assembly: with self-adhesive or screw-in accessories Application area: inside for large or dirty substrates e.g. for indoor wall mounting	Material: Aluminium composite 2.0 mm Surface: glossy Assembly: with self-adhesive or screw-in accessories Application area: indoor and outdoor for large or dirty substrates e.g. for outdoor wall mounting

Individual combination signs

- Marking according to current ASR A1.3
- For wall, ground or machine, the right variant for every requirement



Material	HxB in mm	Item number	PU
Foil	150 x 100	..K..FAB99.150	1
	300 x 200	..K..FAB99.300	1
Plastic 1 mm	300 x 200	..K..PE00.300	1
	450 x 300	..K..PE00.450	1
Aluminium composite 2 mm	450 x 300	..K..DA90.450	1
	600 x 400	..K..DA90.600	1
	750 x 500	..K..DA90.750	1

Include the motif number with the item number for the appropriate material and text:
SVK02.DA90.300 Text: Do not deposit or store any items here
Beispiel für SV02 "Parking or storage prohibited" - aluminium composite 300 x 200mm

Prohibited for industrial trucks (ASR A1.3) Motif number SV01	Deposit or storage of items strictly forbidden (ASR A1.3) Motif number SV02	Depositing pallets prohibited (tried in practice) Motif number SV28	Pedestrians prohibited (ASR A1.3) Motif number SV03	No admission for unauthorised person (ASR A1.3) Motif number SV06
No smoking (ASR A1.3) Motif number SV04	No open flame; fire open ignition source and no smoking (ASR A1.3) Motif number SV05	Extinguishing with water prohibited (ASR A1.3) Motif number SV13	Passenger transport prohibited (ASR A1.3) Motif number SV25	Do not use lift in case of fire (ASR A1.3) Motif number SV32
Eating and drinking prohibited (ASR A1.3) Motif number SV23	Not drinking water (ASR A1.3) Motif number SV22	Spraying with water prohibited (ASR A1.3) Motif number SV21	Entering the area prohibited (ASR A1.3) Motif number SV14	Use of gloves prohibited (ASR A1.3) Motif number SV07
Switched on mobile phones prohibited (ASR A1.3) Motif number SV20	Non-heavy load (ASR A1.3) Motif number SV10	Switching prohibited (ASR A1.3) Motif number SV12	Do not climb (tried in practice) Motif number SV16	Do not climb (ASR A1.3) Motif number SV11
No access for persons with pacemakers or implants. Defibrillators (ASR A1.3) Motif number SV26	Prohibited for persons with metal implants (ASR A1.3) Motif number SV27	Do not reach inside (ASR A1.3) Motif number SV08	Do not touch (ASR A1.3) Motif number SV09	General prohibition signs (ASR A1.3) Motif number SV31

Include the motif number with the item number for the appropriate material: **SV22.FAB99.100** (Example for "Not drinking water" - Foil 100 mm)

Material	Ø in mm	Item number	PU	Material	Ø in mm	Item number	PU	Material	Ø in mm	Item number	PU
Foil	75 mm	FAB99.075	1	Aluminium composite 2 mm	100 mm	DA90.100	1	Polycarbonate	400 mm	CA01.400	1
	100 mm	FAB99.100	1		200 mm	DA90.200	1		600 mm	CA01.600	1
	200 mm	FAB99.200	1		400 mm	DA90.400	1	PVC	400 mm	PA01.400	1
Plastic 1 mm	100 mm	PE00.100	1		600 mm	DA90.600	1	indoor	600 mm	PA01.600	1
	200 mm	PE00.200	1		800 mm	DA90.800	1	PVC	400 mm	PA04.400	1
	400 mm	PE00.400	1		900 mm	DA90.900	1	outdoor	600 mm	PA04.600	1

Mandatory sign

Ensure more safety in your company

Mandatory sign

- Marking according to current ASR A1.3
- For wall, ground or machine, the right variant for every requirement

For the ground	Material: Polycarbonate 0.7 mm Surface: matt Assembly: self-adhesive Application area: inside for smooth and clean grounds particularly robust and impact-resistant	Material: PVC indoor 1.0 mm Surface: slightly glossy Assembly: self-adhesive Application area: inside for different clean grounds non-slip surface R11	Material: PVC outdoor 1.1 mm Surface: slightly glossy Assembly: strong self-adhesive Application area: indoor and outdoor for different clean grounds non-slip surface R11
Wall mounting	Material: Foil 0.1 mm Surface: glossy Assembly: self-adhesive Application area: inside for smooth and clean substrates e.g. on doors or machines	Material: Plastic 1.0 mm Surface: slightly glossy Assembly: with self-adhesive or screw-in accessories Application area: inside for large or dirty substrates e.g. for indoor wall mounting	Material: Aluminium composite 2.0 mm Surface: glossy Assembly: with self-adhesive or screw-in accessories Application area: indoor and outdoor for large or dirty substrates e.g. for outdoor wall mounting

Individual combination signs

- Marking according to current ASR A1.3
- For wall, ground or machine, the right variant for every requirement



Material	HxB in mm	Item number	PU
Foil	150 x 100	..K..FAB99.150	1
	300 x 200	..K..FAB99.300	1
Plastic 1 mm	300 x 200	..K..PE00.300	1
	450 x 300	..K..PE00.450	1
Aluminium composite 2 mm	450 x 300	..K..DA90.450	1
	600 x 400	..K..DA90.600	1
	750 x 500	..K..DA90.750	1

Include the motif number with the item number for the appropriate material and text:
SGK04.DA90.300 Text: Wear protective gloves
Example for SGK04 "Use protective gloves" - aluminium composite 300 x 200mm



General mandatory signs (ASR A1.3) Motif number SG17	Use pedestrian walkway (ASR A1.3) Motif number SG16	Use ear protection (ASR A1.3) Motif number SG02	Use protective gloves (ASR A1.3) Motif number SG04	Wear safety footwear (ASR A1.3) Motif number SG05
Wear a safety hat (ASR A1.3) Motif number SG03	Use safety mask (ASR A1.3) Motif number SG10	Use eye protection (ASR A1.3) Motif number SG01	Wear dust mask (ASR A1.3) Motif number SG26	Wear protective clothing (ASR A1.3) Motif number SG09
Use skin protection (ASR A1.3) Motif number SG13	Wash hands (ASR A1.3) Motif number SG14	Wear protective apron (ASR A1.3) Motif number SG08	Wear high visibility vest (ASR A1.3) Motif number SG06	Read operating instructions (ASR A1.3) Motif number SG36

Include the motif number with the item number for the appropriate material: **SG04.FAB99.100** (Example for "Use protective gloves" - Foil 100 mm)

Material	Ø in mm	Item number	PU	Material	Ø in mm	Item number	PU	Material	Ø in mm	Item number	PU
Foil	75 mm	FAB99.075	1	Aluminium composite 2 mm	100 mm	DA90.100	1	Polycarbonate	400 mm	CA01.400	1
	100 mm	FAB99.100	1		200 mm	DA90.200	1		600 mm	CA01.600	1
	200 mm	FAB99.200	1		400 mm	DA90.400	1	PVC	400 mm	PA01.400	1
Plastic 1 mm	100 mm	PE00.100	1		600 mm	DA90.600	1	PVC indoor	600 mm	PA01.600	1
	200 mm	PE00.200	1		800 mm	DA90.800	1	PVC outdoor	400 mm	PA04.400	1
	400 mm	PE00.400	1		900 mm	DA90.900	1		600 mm	PA04.600	1

Warning signs

Ensure more safety in your company



Prohibitory signs

- Marking according to current ASR A1.3
- For wall, ground or machine, the right variant for every requirement

For the ground	Material: Polycarbonate 0.7 mm Surface: matt Assembly: self-adhesive Application area: inside for smooth and clean grounds particularly robust and impact-resistant	Material: PVC indoor 1.0 mm Surface: slightly glossy Assembly: self-adhesive Application area: inside for different clean grounds non-slip surface R11	Material: PVC outdoor 1.1 mm Surface: slightly glossy Assembly: strong self-adhesive Application area: indoor and outdoor for different clean grounds non-slip surface R11
	Material: Foil 0.1 mm Surface: glossy Assembly: self-adhesive Application area: inside for smooth and clean substrates e.g. on doors or machines	Material: Plastic 1.0 mm Surface: slightly glossy Assembly: with self-adhesive or screw-in accessories Application area: inside for large or dirty substrates e.g. for indoor wall mounting	Material: Aluminium composite 2.0 mm Surface: glossy Assembly: with self-adhesive or screw-in accessories Application area: indoor and outdoor for large or dirty substrates e.g. for outdoor wall mounting

Individual combination signs

- Marking according to current ASR A1.3
- For wall, ground or machine, the right variant for every requirement



Required text according to your data



CAUTION
forklifts

Material	HxB in mm	Item number	PU
Foil	150 x 100	..K..FAB99.150	1
	300 x 200	..K..FAB99.300	1
Plastic 1 mm	300 x 200	..K..PE00.300	1
	450 x 300	..K..PE00.450	1
Aluminium composite 2 mm	450 x 300	..K..DA90.450	1
	600 x 400	..K..DA90.600	1
	750 x 500	..K..DA90.750	1

Include the motif number with the item number for the appropriate material and text:
SWK14.DA90.300 Text: Caution forklifts
Example for SW14 "Caution forklifts" - aluminium composite 300 x 200mm



General warning sign (ASR A1.3)
Motif number | **SW01**



Warning of forklifts (ASR A1.3)
Motif number | **SW14**



Warning of explosive atmosphere (ASR A1.3)
Motif number | **SW27**



Warning against electrical voltage (ASR A1.3)
Motif number | **SW12**



Warning against laser beams (ASR A1.3)
Motif number | **SW04**



Warning against toxic substances (ASR A1.3)
Motif number | **SW16**



Warning of flammable substances (ASR A1.3)
Motif number | **SW21**



Warning of hot surface (ASR A1.3)
Motif number | **SW17**



Risk of falling warning (ASR A1.3)
Motif number | **SW08**



Risk of slipping warning (ASR A1.3)
Motif number | **SW11**



Warning against opposing rollers (ASR A1.3)
Motif number | **SW13**



Warning of floating load (ASR A1.3)
Motif number | **SW15**



Warning of magnetic field (ASR A1.3)
Motif number | **SW06**



Warning about danger through charging batteries (ASR A1.3)
Motif number | **SW26**



Warning against radioactive substances or ionising radiation (ASR A1.3)
Motif number | **SW03**

Include the motif number with the item number for the appropriate material: **SW01.FAB99.100** (Example for "General warning signs" - Foil 100 mm)

Material	SL in mm	Item number	PU
Foil	75 mm	FAB99.075	1
	100 mm	FAB99.100	1
	200 mm	FAB99.200	1
Plastic 1 mm	100 mm	PE00.100	1
	200 mm	PE00.200	1
	400 mm	PE00.400	1

Material	SL in mm	Item number	PU
Aluminium composite 2 mm	100 mm	DA90.100	1
	200 mm	DA90.200	1
	400 mm	DA90.400	1
	600 mm	DA90.600	1
	800 mm	DA90.800	1
	900 mm	DA90.900	1

Material	SL in mm	Item number	PU
Polycarbonate	400 mm	CA01.400	1
	600 mm	CA01.600	1
PVC indoor	400 mm	PA01.400	1
	600 mm	PA01.600	1
PVC outdoor	400 mm	PA04.400	1
	600 mm	PA04.600	1

Accessories and attachment

Useful aids for cleaning and assembly

Primer No.5

- | Primer No. 5 increases the adhesion of a tape on critical surfaces
- | ALWAYS required for outdoor use!

Content: 250 ml for approx. 0.75 m²
1000 ml for approx. 3.0 m²

250 ml (0.75 m ²)	1000 ml (3 m ²)
3051.25.250	3051.25.1000



Screw set

- | For fixing signs to the wall

Scope of delivery: 4x screws 4x35 mm
4x cover
4x dowels 6 mm

Screw set	Item number
Set of 4	8008.00.105



Edge sealing

- | For sealing of edges
- | Prevents penetration of moisture
- | Enough for up to 25 metres

Content: 140 ml for approx. 25 m

Edge sealing	Item number
140 ml	6090.20.140




Adhesive pads

- | For fixing lightweight signs
- | Aluminium, plastic or rigid foam signs
- | On smooth surfaces

Material: PE foam
Material thickness: 0.8 - 1.1 mm
Adhesive: Acrylate
Size: 20 x 50 mm
Application area: inside

Adhesive pads	Item number
Set of 4	8008.00.106
Set of 8	8008.00.107

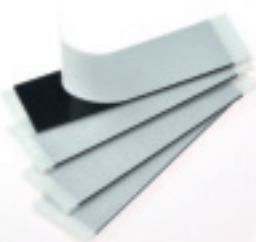

Cleaner - Isopropanol

- | For cleaning surfaces
- | Degreases and dissolves dirt

Content: Isopropyl 70%
250ml

Isopropyl	Item number
250 ml	9104.SW.1745



Masking tape

- | For fixing and covering
- | Residue-free removable

Material: Crepe paper
Material thickness: 0.12 mm
Adhesive: Natural rubber

Width x length	Item number
19 mm x 50 m	5361.50.019
25 mm x 50 m	5361.50.025
38 mm x 50 m	5361.50.038
50 mm x 50 m	5361.50.050



Acrylic foam

- | Double-sided adhesive tape for gluing signs
- | For transparent and permanent bonding
- | Suitable on glass, acrylic glass, stainless steel etc.

Material: Pure acrylic foam
Material thickness: 1.0 mm
Adhesive: Acrylate
Adhesion: 30 N/25mm
Colour: highly transparent

Width x length	Item number
12 mm x 11 m	4403.11.012
19 mm x 11 m	4403.11.019
25 mm x 11 m	4403.11.025




PE foam tape

- | Double-sided adhesive tape for fastening and mounting
- | For lightweight signs, mirrors, rails or screens
- | Suitable on metal, plastic or glass

Material: PE foam
Material thickness: 0.95 mm
Adhesive: Acrylate
Adhesion: 22 N/25mm
Colour: black

Width x length	Item number
12 mm x 10 m	4533.10.012
19 mm x 10 m	4533.10.019
25 mm x 10 m	4533.10.025

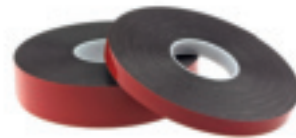

Wiper

- | For easily adhering materials such as foil
- | For bubble-free installation

Colour: white/cream
Material: Plastic / felt
Dimensions: approx. 70 x 100 mm

Wiper	Item number
Plastic wiper	8000.01.022/1
Felt wiper	8000.01.025



Pressure roller

- | For moving markings and signs
- | For pressing in profiled substrates
- | For bubble-free pressing

Short version: Silicone roller
Roller width: 45 mm

Long version: Rubber roller
Roller width: 75 mm

Pressure roller	Item number
Short version (1)	8002.11.031
Long version (2)	8002.00.921



Adhesive cloth tape

- | Universal use
- | For bundling, fastening or sealing

Material: Fabric matt
Material thickness: 0.28 mm
Adhesive: Natural rubber
Colour: grey

Width x length	Item number
19 mm x 50 m	5564.50.019
38 mm x 50 m	5564.50.038
50 mm x 50 m	5564.50.050



PE foam tape

- | Double-sided adhesive tape for fastening and mounting
- | For lightweight signs, mirrors, rails or screens
- | Suitable on metal, plastic or glass

Material: PE foam
Material thickness: 1.1 mm
Adhesive: Acrylate
Adhesion: 22 N/25mm
Colour: white

Width x length	Item number
12 mm x 10 m	4514.10.012
19 mm x 10 m	4514.10.019
25 mm x 10 m	4514.10.025



Labels for storage and shelves

Clear marking of storage spaces

High-quality labels for every requirement



Labels

High-quality labels for every requirement

- Various design options
- Different materials and sizes
- Adjustable colour coding system
- Wear-resistant digital printing
- Personalised with your logo
- All barcode systems possible
- Individual labels or sheets



For more information or to make an enquiry contact us.
We're happy to send you material samples before placing an order.

To guarantee a fast delivery we need the following information:

Material:
foil, PC, magnetic foil, RA1, freezer foil

Dimensions:
Height x width, e.g. 50 x 250 mm, 100 x 120 mm

Colour:
e.g. black on yellow, black on white
all colour combinations possible

Text/Content:
according to specification by Excel list

Barcode system:
e.g. code 128, code 39, QR code

Quantity



Foil labels

- For smooth and gap-free substrates
- Self-adhesive
- Residue-free removable
- Abrasion-resistant pressure

Material: Foil
Material thickness: 0.2 mm
Surface: matt
Adhesive: Acrylate
Laminate: by request



Magnetic labels

- Adheres to all ferrous surfaces
- Suitable for cold rooms
- Flexibly applicable
- Can be replaced quickly

Material: Magnetic foil
Material thickness: 1.0 - 3.0 mm
Surface: matt
Laminate: by request



Polycarbonate labels

- Extremely resistant
- Covers bumps in profile
- Self-adhesive
- Abrasion-resistant pressure

Material: Polycarbonate
Material thickness: 0.7 mm
Surface: matt
Adhesive: Acrylate



Retroreflective labels

- Widely scannable for PDC devices
- Retro-reflective surface
- Self-adhesive
- Abrasion-resistant pressure

Material: Reflective foil RA1
Material thickness: 0.7 mm
Surface: glossy
Adhesive: Acrylate
Laminate: by request





NEW

Deep freeze labels

- Ideal for applications in the freezer area
- Resistant to temperatures between -40°C and +90°C
- Affixing during cooling mode down to -20°C
- For smooth and gap-free substrates
- Self-adhesive
- Abrasion-resistant pressure

Material: Foil
Material thickness: 0.1 mm
Adhesive: special adhesive
Laminate: by request

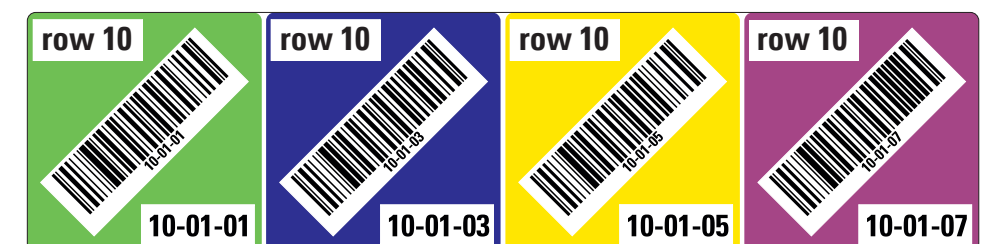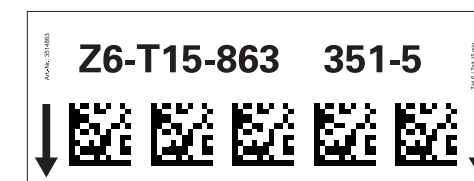

Operational labelling

Block storage and aisle signs for hanging labels



Block storage and shelf signs

For changeable or fixed labelling

- For marking racks and storage areas
- Ideal supplement for floor markings
- Hanging, self-adhesive or screw-fastening
- Format and size as desired by customer
- Angular deflection allows better readability
- Retroreflective for large distances



Bulk storage signs

Material: rigid foam or PVC
Material thickness: 3 mm
Surface: retroreflective by request
Max dimensions: 1200 x 1200 mm
Application area: inside
Completely individual design

Rack labels / Aisle labels

Material: aluminium composite, rigid foam or PVC
Material thickness: 3 - 10 mm
Surface: retroreflective by request
Max dimensions: 1200 x 2000 mm (multi-part printing possible)
Application area: indoor and outdoor
Completely individual design

All signs are manufactured individually according to customer requirements. We can provide comprehensive advice!

Spray stencils

- For labelling and marking warehouse and storage locations
- Can be used on countless surfaces with paint spray
- Reusable
- Letter and number sets

Material: Plastic
Material thickness: 0.2 mm
Font: DIN STENCIL FONT (other fonts by request)
50mm spray protection all around



	Character height 50 mm	Character height 100 mm	Character height 200 mm	Piece
A - Z	LSS.PC00.050-AZ	LSS.PC00.100-AZ	LSS.PC00.200-AZ	26
0 - 9	LSS.PC00.050-09	LSS.PC00.100-09	LSS.PC00.200-09	10

A	LSS.PC00.050-A	LSS.PC00.100-A	LSS.PC00.200-A	1
B	LSS.PC00.050-B	LSS.PC00.100-B	LSS.PC00.200-B	1
C	LSS.PC00.050-C	LSS.PC00.100-C	LSS.PC00.200-C	1
D	LSS.PC00.050-D	LSS.PC00.100-D	LSS.PC00.200-D	1
E	LSS.PC00.050-E	LSS.PC00.100-E	LSS.PC00.200-E	1
F	LSS.PC00.050-F	LSS.PC00.100-F	LSS.PC00.200-F	1
G	LSS.PC00.050-G	LSS.PC00.100-G	LSS.PC00.200-G	1
H	LSS.PC00.050-H	LSS.PC00.100-H	LSS.PC00.200-H	1
I	LSS.PC00.050-I	LSS.PC00.100-I	LSS.PC00.200-I	1
J	LSS.PC00.050-J	LSS.PC00.100-J	LSS.PC00.200-J	1
K	LSS.PC00.050-K	LSS.PC00.100-K	LSS.PC00.200-K	1
L	LSS.PC00.050-L	LSS.PC00.100-L	LSS.PC00.200-L	1
M	LSS.PC00.050-M	LSS.PC00.100-M	LSS.PC00.200-M	1
N	LSS.PC00.050-N	LSS.PC00.100-N	LSS.PC00.200-N	1
O	LSS.PC00.050-O	LSS.PC00.100-O	LSS.PC00.200-O	1
P	LSS.PC00.050-P	LSS.PC00.100-P	LSS.PC00.200-P	1
Q	LSS.PC00.050-Q	LSS.PC00.100-Q	LSS.PC00.200-Q	1
R	LSS.PC00.050-R	LSS.PC00.100-R	LSS.PC00.200-R	1
S	LSS.PC00.050-S	LSS.PC00.100-S	LSS.PC00.200-S	1
T	LSS.PC00.050-T	LSS.PC00.100-T	LSS.PC00.200-T	1
U	LSS.PC00.050-U	LSS.PC00.100-U	LSS.PC00.200-U	1
V	LSS.PC00.050-V	LSS.PC00.100-V	LSS.PC00.200-V	1
W	LSS.PC00.050-W	LSS.PC00.100-W	LSS.PC00.200-W	1
X	LSS.PC00.050-X	LSS.PC00.100-X	LSS.PC00.200-X	1
Y	LSS.PC00.050-Y	LSS.PC00.100-Y	LSS.PC00.200-Y	1
Z	LSS.PC00.050-Z	LSS.PC00.100-Z	LSS.PC00.200-Z	1

0	LSS.PC00.050-0	LSS.PC00.100-0	LSS.PC00.200-0	1
1	LSS.PC00.050-1	LSS.PC00.100-1	LSS.PC00.200-1	1
2	LSS.PC00.050-2	LSS.PC00.100-2	LSS.PC00.200-2	1
3	LSS.PC00.050-3	LSS.PC00.100-3	LSS.PC00.200-3	1
4	LSS.PC00.050-4	LSS.PC00.100-4	LSS.PC00.200-4	1
5	LSS.PC00.050-5	LSS.PC00.100-5	LSS.PC00.200-5	1
6	LSS.PC00.050-6	LSS.PC00.100-6	LSS.PC00.200-6	1
7	LSS.PC00.050-7	LSS.PC00.100-7	LSS.PC00.200-7	1
8	LSS.PC00.050-8	LSS.PC00.100-8	LSS.PC00.200-8	1
9	LSS.PC00.050-9	LSS.PC00.100-9	LSS.PC00.200-9	1

Ä	LSS.PC00.050-S1	LSS.PC00.100-S1	LSS.PC00.200-S1	1
Ö	LSS.PC00.050-S2	LSS.PC00.100-S2	LSS.PC00.200-S2	1
Ü	LSS.PC00.050-S3	LSS.PC00.100-S3	LSS.PC00.200-S3	1
:	LSS.PC00.050-S4	LSS.PC00.100-S4	LSS.PC00.200-S4	1
-	LSS.PC00.050-S5	LSS.PC00.100-S5	LSS.PC00.200-S5	1
/	LSS.PC00.050-S6	LSS.PC00.100-S6	LSS.PC00.200-S6	1
&	LSS.PC00.050-S7	LSS.PC00.100-S7	LSS.PC00.200-S7	1

Individual spray stencils

- With your logo, series of numbers, lettering or pictogram
- Other materials are also available by request



Masking tape

- For fastening spray templates
- Can easily be removed after marking



Crepe tape	Item number
25 mm x 50 m	5361.50.025

Cloth tapes

For a multitude of universal application possibilities




Adhesive cloth patches || WT-5561



- Quick and easy to attach
- Universal application possibilities
- Excellent immediate adhesion
- Easy, residue-free removal

Material: PE-coated cloth
Material thickness: 0.29 mm
Surface: glossy
Adhesive: Natural rubber
Application area: inside
Quantity: 4000 patches per roll

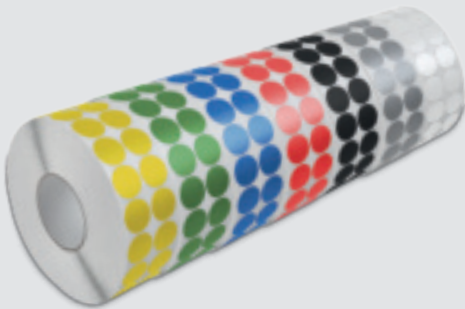


Patches | Standard

Colour		30 mm	PU
yellow		5561.04.R030	1
red		5561.01.R030	1
blue		5561.10.R030	1
green		5561.02.R030	1
white		5561.08.R030	1
grey		5561.13.R030	1
black		5561.07.R030	1

Patches | Special for label dispensers

Colour		30 mm	PU
yellow		5561.04.RF030	1
red		5561.01.RF030	1
blue		5561.10.RF030	1
green		5561.02.RF030	1
white		5561.08.RF030	1
grey		5561.13.RF030	1
black		5561.07.RF030	1

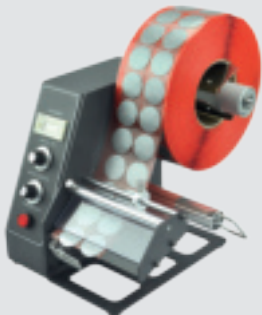

Label dispensers

- Electronic dispenser with adjustable flow speed and overhang
- Integrated label counter

Label dispensers	
Item number	8000.1150.D

Adhesive cloth tape || WT-5562

The matt cloth tape for a number of application possibilities



- Ideal for binding, fastening, bundling, repairing or sealing
- Wide variety of colours perfect for industrial labelling
- Available in neon colours
- Matt, wear and tear resistant, can be labelled
- Can be removed from most surfaces without leaving residue

Material: PE-coated cloth
Material thickness: 0.29 mm
Surface: matt
Adhesive: Natural rubber
Application area: inside



Colour		25 mm x 50 m	38 mm x 50 m	50 mm x 50 m	75 mm x 50 m	100 mm x 50 m	PU
yellow		5562.04.025	5562.04.038	5562.04.050	5562.04.075	5562.04.100	1
red		5562.01.025	5562.01.038	5562.01.050	5562.01.075	5562.01.100	1
green		5562.02.025	5562.02.038	5562.02.050	5562.02.075	5562.02.100	1
blue		5562.10.025	5562.10.038	5562.10.050	5562.10.075	5562.10.100	1
brown		5562.05.025	5562.05.038	5562.05.050	5562.05.075	5562.05.100	1
black		5562.07.025	5562.07.038	5562.07.050	5562.07.075	5562.07.100	1
white		5562.08.025	5562.08.038	5562.08.050	5562.08.075	5562.08.100	1
grey		5562.06.025	5562.06.038	5562.06.050	5562.06.075	5562.06.100	1

Colour		25 mm x 25 m	38 mm x 25 m	50 mm x 25 m	75 mm x 25 m	100 mm x 25 m	PU
neon yellow		5562.31.025	5562.31.038	5562.31.050	5562.31.075	5562.31.100	1
neon green		5562.30.025	5562.30.038	5562.30.050	5562.30.075	5562.30.100	1
neon orange		5562.32.025	5562.32.038	5562.32.050	5562.32.075	5562.32.100	1
neon pink		5562.33.025	5562.33.038	5562.33.050	5562.33.075	5562.33.100	1


Adhesive cloth tape || WT-5561

The glossy cloth tape for a number of application possibilities




- Ideal for binding, fastening, bundling, repairing or sealing
- Wide variety of colours perfect for industrial labelling
- Quick and noticeable labelling of danger points
- Glossy, wear and tear resistant, can be labelled
- Can be removed from most surfaces without leaving residue

Material: PE-coated cloth
Material thickness: 0.29 mm
Surface: glossy
Adhesive: Natural rubber
Application area: inside

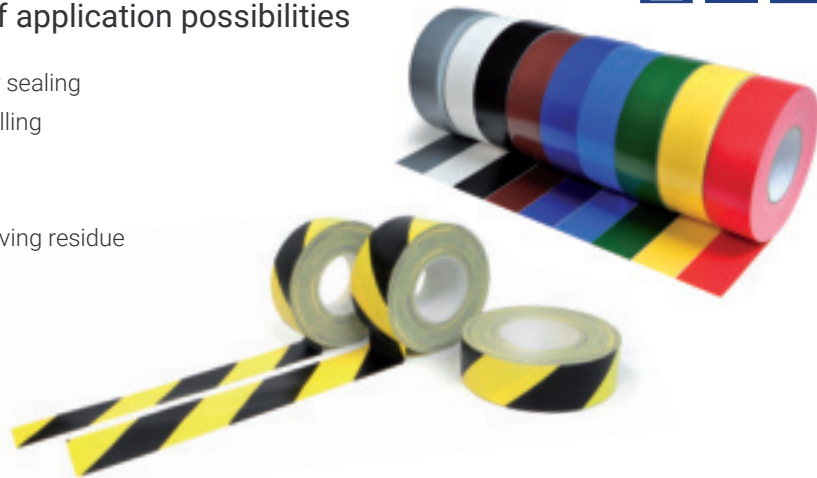


Colour		25 mm x 50 m	38 mm x 50 m	50 mm x 50 m	75 mm x 50 m	100 mm x 50 m	PU
yellow/black		5561.17.025-Li	5561.17.038-Li	5561.17.050-Li	5561.17.075-Li	5561.17.100-Li	1
yellow/black		5561.17.025-Re	5561.17.038-Re	5561.17.050-Re	5561.17.075-Re	5561.17.100-Re	1
yellow		5561.04.025	5561.04.038	5561.04.050	5561.04.075	5561.04.100	1
black		5561.07.025	5561.07.038	5561.07.050	5561.07.075	5561.07.100	1
white		5561.08.025	5561.08.038	5561.08.050	5561.08.075	5561.08.100	1
red		5561.01.025	5561.01.038	5561.01.050	5561.01.075	5561.01.100	1
orange		5561.12.025	5561.12.038	5561.12.050	5561.12.075	5561.12.100	1
light green		5561.15.025	5561.15.038	5561.15.050	5561.15.075	5561.15.100	1
green		5561.02.025	5561.02.038	5561.02.050	5561.02.075	5561.02.100	1
light blue		5561.03.025	5561.03.038	5561.03.050	5561.03.075	5561.03.100	1
blue		5561.10.025	5561.10.038	5561.10.050	5561.10.075	5561.10.100	1
brown		5561.05.025	5561.05.038	5561.05.050	5561.05.075	5561.05.100	1
silver grey		5561.13.025	5561.13.038	5561.13.050	5561.13.075	5561.13.100	1



Point out left or right
on a barrier or
danger zone!

Technical adhesive tapes

Double-sided tape for a multitude of application possibilities

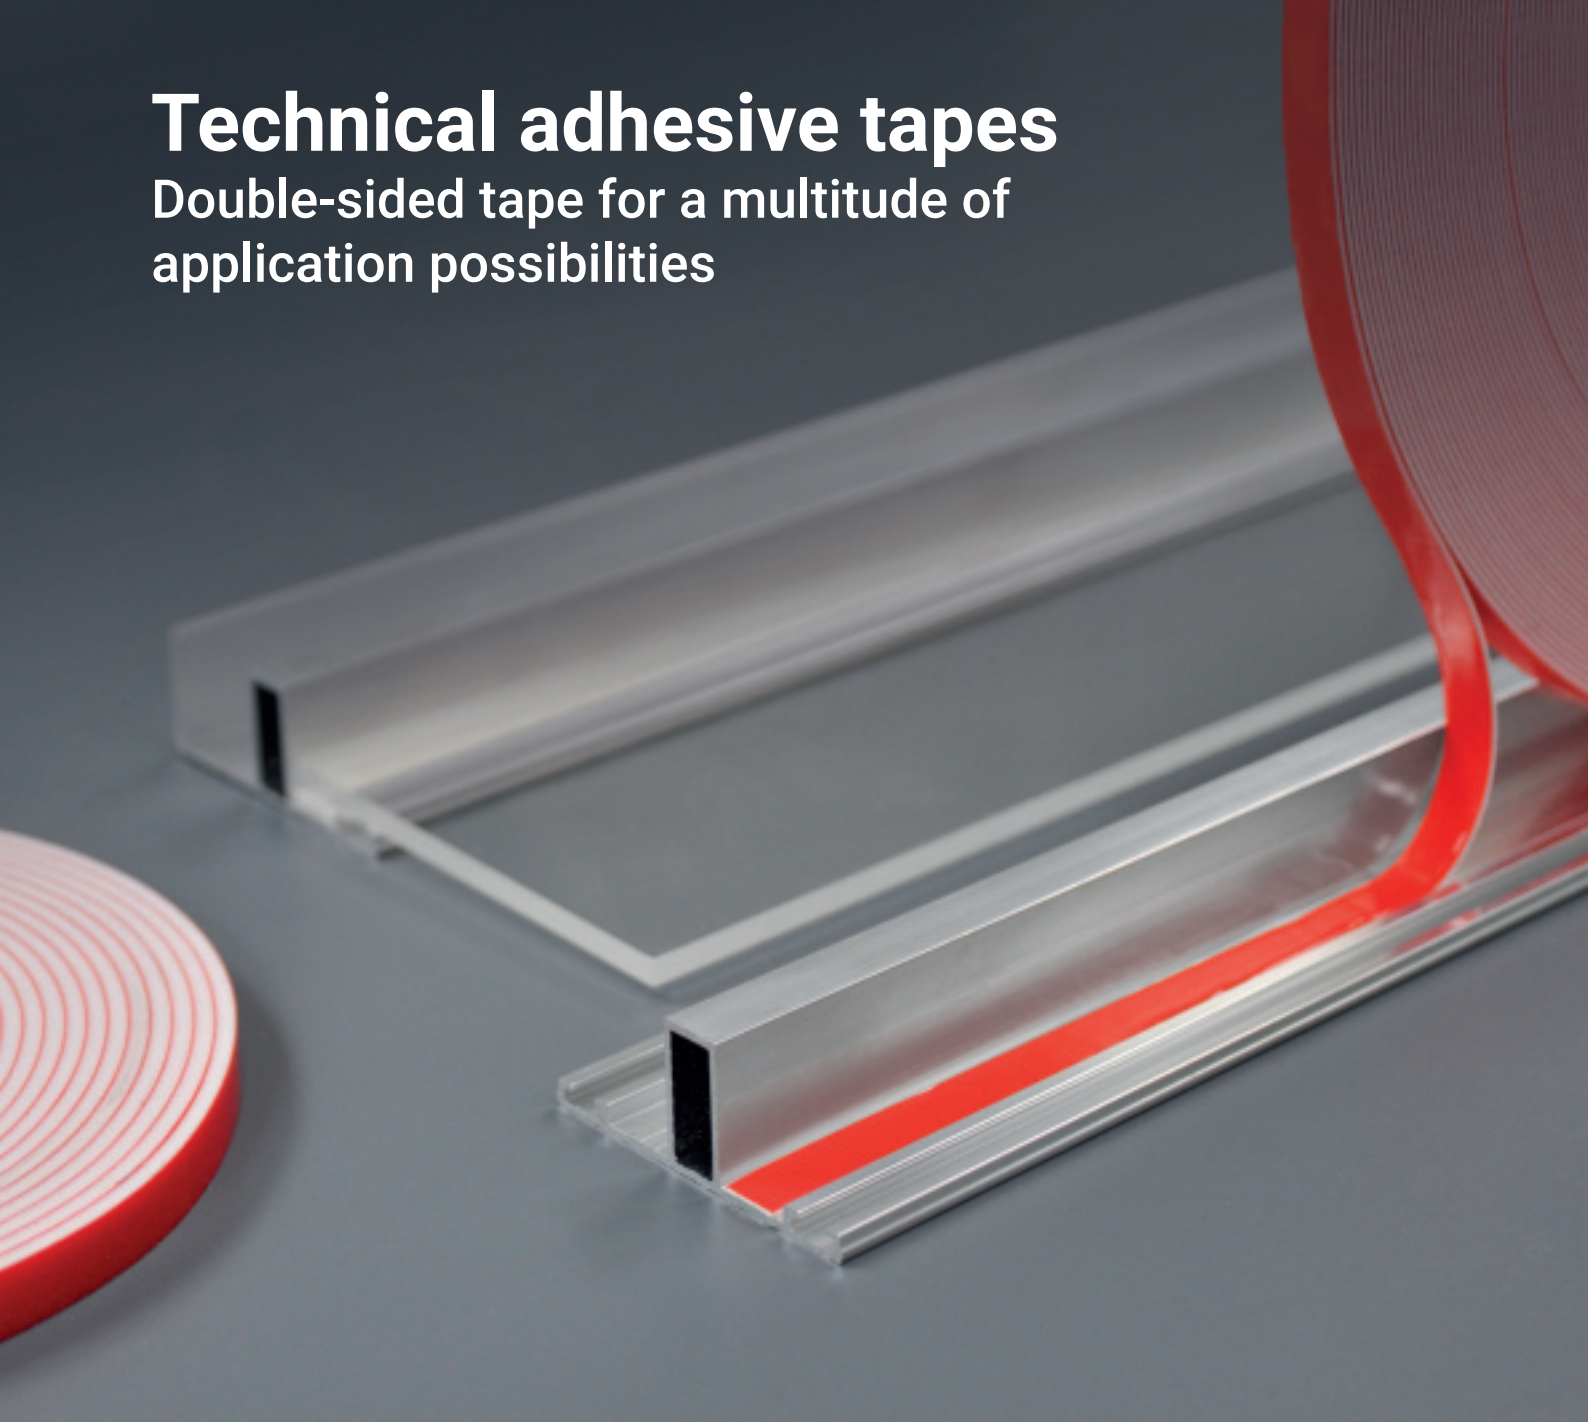

PET adhesive tape || WT-4210

The strong double-sided PET foil tape

- Excellent adhesive properties, high initial and long-lasting adhesion
- Suitable for high- and low-energy surfaces
- Good UV and ageing resistance
- Universal and powerfully adhesive tape for versatile applications

Material: PET foil carrier
Material thickness: 0.2 mm
Colour: transparent
Adhesive: Acrylate adhesive
Adhesion: 25 N/25mm
Temp. resistance: -30°C to +120°C
Available width/length: 4 mm – 1000 mm / 25 m or 50 m



Width x length	12 mm x 25 m	12 mm x 50 m	19 mm x 25 m	19 mm x 50 m	25 mm x 25 m	25 mm x 50 m	PU
Item number	4210.25.012	4210.50.012	4210.25.019	4210.50.019	4210.25.025	4210.50.025	1

Acrylic foam || WT-4402

Double-sided acrylate tape for long-lasting invisible bonding

- High immediate adhesion and extra strong adhesive power
- Especially for long-lasting and "invisible" bonding
- UV, plasticizer, weather and ageing resistant
- Best suited for glass, acrylic glass, plastic or stainless steel

Material: Pure acrylic foam
Material thickness: 0.5 mm (± 5%)
Colour: highly transparent
Adhesive: Acrylate adhesive
Adhesion: 34 N/25mm
Temp. resistance: -40°C to +90°C (up to +150°C for short periods)
Available width/length: 6 mm – 450 mm / 11 m or 33 m



Width x length	12 mm x 11 m	12 mm x 33 m	19 mm x 11 m	19 mm x 33 m	25 mm x 11 m	25 mm x 33 m	PU
Item number	4402.11.012	4402.11.012	4402.11.019	4402.11.019	4402.11.025	4402.11.025	1

Fleece adhesive tape || WT-4126

Double-sided paper tissue tape that can be ripped off by hand

- For self-adhesive finishing or splicing of foils, paper, cardboard, foams, textiles or plastics
- Excellent adhesive properties with high initial adhesion
- Works on uneven surfaces due to the low thickness

Material: Paper tissue
Material thickness: 0.12 mm
Colour: transparent
Adhesive: Acrylate, modified
Adhesion: 25 N/25mm
Temp. resistance: -20°C to +120°C
Available width/length: 6 mm – 1200 mm / 50 m, 100 m, 200 m



Width x length	12 mm x 50 m	19 mm x 50 m	25 mm x 50 m	50 mm x 50 m	PU
Item number	4126.50.012	4126.50.019	4126.50.025	4126.50.050	1

PE foam || WT-4514

Double-sided foam tape for fastening and mounting

- High immediate adhesion and shear strength
- Good expansion compensation between different materials
- Vibration-damping
- For fastening rails, signs, mirrors, frames or screens

Material: PE foam (100 kg/m³)
Material thickness: 1.1 mm (± 5%)
Colour: white
Adhesive: Acrylate adhesive
Adhesion: 22 N/25mm
Temp. resistance: -30°C to 80°C (up to 120°C for short periods)
Available width/length: 6 mm – 1000 mm / 10 m or 50 m



Width x length	12 mm x 10 m	12 mm x 50 m	19 mm x 10 m	19 mm x 50 m	25 mm x 10 m	25 mm x 50 m	PU
Item number	4514.10.012	4514.50.012	4514.10.019	4514.50.019	4514.10.025	4514.50.025	1

One-sided adhesive tapes

For covering and fastening



PET high-temperature tape || WT-5230

- | For covering and fastening in high temperatures
- | High-performance silicone adhesive - comes off without leaving residue
- | Extremely heat and UV resistant
- | Suitable for covering circuit boards or powder coating

Material: Polyester foil
Material thickness: 0.05 mm
Overall thickness: 0.09 mm
Colour: green
Adhesive: Silicone adhesive
Adhesion: 7.5 N/25mm
Elongation at break: 90 %
Temp. resistance: -50°C to +180°C (up to +220°C for short periods)
Available width/length: 3 mm – 900 mm / 66 m



Width x length	12 mm x 66 m	19 mm x 66 m	38 mm x 66 m	50 mm x 66 m	PU
Item number	5230.66.012	5230.66.019	5230.66.038	5230.66.050	1

PET high-temperature tape || WT-5234

- | For covering and fastening in high temperatures
- | High-performance silicone adhesive - comes off without leaving residue
- | Extremely heat and UV resistant
- | Ideal for taping on intricate contours

Material: Polyester foil
Material thickness: 0.03 mm
Overall thickness: 0.06 mm
Colour: blue
Adhesive: Silicone adhesive
Adhesion: 7.0 N/25mm
Elongation at break: 30 %
Temp. resistance: -50°C to +180°C (up to +220°C for short periods)
Available width/length: 3 mm – 900 mm / 66 m



Width x length	12 mm x 66 m	19 mm x 66 m	38 mm x 66 m	50 mm x 66 m	PU
Item number	5234.66.012	5234.66.019	5234.66.038	5234.66.050	1

Fineline masking tape || WT-5363

Ideal for use in wet varnishing

- | Masking tape made of very thin, waterproof low-crepe paper
- | Fine, exact colour boundaries on smooth and slightly rough surfaces
- | Heat and UV resistant
- | No shrinkage, easily removable with no residue

Material: Fineline paper
Material thickness: 0.09 mm
Colour: orange
Adhesive: Acrylate
Adhesion: 5 N/25mm
Temp. resistance: up to +80°C (up to +100°C for short periods)
Available width/length: 5 mm – 1200 mm / 50 m



Width x length	19 mm x 50 m	38 mm x 50 m	50 mm x 50 m	PU
Item number	5363.50.019	5363.50.038	5363.50.050	1

Polyimide film || WT-5231

- | For covering and fastening in high temperatures
- | High-performance silicone adhesive - comes off without leaving residue
- | Extremely heat and UV resistant
- | Excellent insulation properties

Material: one-sided adhesive polyimide film
Material thickness: 0.0025 mm
Overall thickness: 0.07 mm
Colour: amber
Adhesive: Silicone adhesive
Adhesion: 5.5 N/25mm
Elongation at break: 60 %
Temp. resistance: -50°C to +180°C (up to +260°C for short periods)
Available width/length: 3 mm – 900 mm / 33 m



Width x length	12 mm x 33 m	19 mm x 33 m	25 mm x 33 m	50 mm x 33 m	PU
Item number	5231.33.012	5231.33.019	5231.33.025	5231.33.050	1

NEW

Safety signs for the ground

More safety with our new ground signs



More information
and other designs
page 26

SANPACK®

Sanpack GmbH
Otto-Hahn-Str. 8
D-21509 Glinde

Tel.: +49 40 72 77 99 0
Fax: +49 40 72 77 99 37
web: www.sanpack.de
email: info@sanpack.de

All information and recommendations are given by us to the best of our knowledge and based on practical experience.

However, we do not assume any guarantee for the correctness of the statements, in particular with regard to marketability and suitability for a specific purpose. Consequently, the user is responsible for deciding whether a product is suitable for a particular purpose and for the user's type of application. If you require assistance, our technical staff will be happy to provide you with advice and support. We assume no liability for improper processing and mechanical damage.

Our terms and conditions apply.

Misprints, errors and changes are reserved.